

If you plan to submit a bid directly to the Department of Transportation

PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later than 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

REQUESTS FOR AUTHORIZATION TO BID

Contractors wanting to bid on items included in a particular letting must submit the properly completed "Request for Proposal Forms and Plans & Request for Authorization to Bid" (BDE 124) and the ORIGINAL "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

WHO CAN BID ?

Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a **Proposal Denial and/or Authorization Form**, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Proposal Denial and/or Authorization Form** will indicate the reason for denial.

ABOUT AUTHORIZATION TO BID: Firms that have not received an authorization form within a reasonable time of complete and correct original document submittal should contact the department as to status. This is critical in the week before the letting. These documents must be received three days before the letting date. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of plans and proposals	217/782-7806

ADDENDUMS TO THE PROPOSAL FORMS

Planholders should verify that they have received and incorporated the revisions prior to submitting their bid. If plans/proposals were requested prior to the date of the addendum, an addendum package should have been mailed to the planholder. If plans/proposals were ordered after the date of the addendum, the plans/proposal package should already include all revisions and an identifying addendum sheet immediately after the proposal cover sheet. Failure by the bidder to include an addendum could result in a bid being rejected as irregular. If a planholder has not received an addendum within 5 days after the addendum date noted, they should call 217-782-7806.

84

RETURN WITH BID

Proposal Submitted By

Name

Address

City

Letting November 9, 2001

NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction.
(SEE INSTRUCTIONS ON THE INSIDE OF COVER)

Notice To Bidders, Specifications, Proposal, Contract and Contract Bond



Illinois Department
of Transportation

Springfield, Illinois 62764

Contract No. 64569
Winnebago County
Section 40R-1-M-2
Project ACNHF-ACHS-301(19)
FAP Route 301
District 2 Construction Funds

PLEASE MARK THE APPROPRIATE BOX BELOW:

☐ A Bid Bond is included.

☐ A Cashier's Check or a Certified Check is included

Prepared by

F

Checked by

(Printed by authority of the State of Illinois)

BIDDERS NEED NOT RETURN THE ENTIRE PROPOSAL
(See instructions inside front cover)

INSTRUCTIONS

ABOUT IDOT PROPOSALS: All proposals issued by IDOT are potential bidding proposals. Each proposal contains all Certifications and Affidavits, a Proposal Signature Sheet and a Proposal Bid Bond required for Prime Contractors to submit a bid after written **Authorization to Bid** has been issued by IDOT's Central Bureau of Construction.

HOW MANY PROPOSALS SHOULD PROSPECTIVE BIDDERS REQUEST?: Prospective bidders should, prior to submitting their initial request for plans and proposals, determine their needs and request the total number of plans and proposals needed for each item requested. There will be a nonrefundable charge of \$15 for each set of plans and specifications issued.

WHO CAN BID?: Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction. To request authorization, a potential bidder must complete and submit Part B of the Request for Proposal Forms and Plans & Request for Authorization to Bid form (BDE 124) and submit an original Affidavit of Availability (BC 57).

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a **Proposal Denial and/or Authorization Form**, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Proposal Denial and/or Authorization Form** will indicate the reason for denial. If a contractor has requested to bid but has not received a **Proposal Denial and/or Authorization Form**, they should contact the Central Bureau of Construction in advance of the letting date.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of plans and proposals	217/782-7806

RETURN WITH BID



Illinois Department
of Transportation

PROPOSAL

1. Proposal of _____

for the improvement officially known as:

**Contract No. 64569
Winnebago County
Section 40R-1-M-2
Project ACNHF-ACHS-301(19)
FAP Route 301
District 2 Construction Funds**

- (a) The proposed improvement shown in detail on the plans issued by the Department or on the location sketch, schedule and detail sheets included herein, includes, in general, the following described work:

Traffic signals and intersection channelization at US Route 20 and Winnebago Road located north of Winnebago.

TO THE DEPARTMENT OF TRANSPORTATION

2. The plans for the proposed work are those issued by the Department of Transportation to cover the work described above.

The specifications are those prepared by the Department of Transportation and designated as "Standard Specifications for Road and Bridge Construction" and the "Supplemental Specifications and Recurring Special Provisions" thereto, adopted and in effect on the date of invitation for bids.

3. **COMPLETION TIME/LIQUIDATED DAMAGES.** It being understood and agreed that the completion within the time limit is an essential part of the contract, the undersigned agrees to complete the work within 90 working days, unless additional time shall be granted by the Engineer in accordance with the provisions of the specifications. In case of failure to complete the work on or before the time named herein, or within such extra time as may have been allowed by extensions, the undersigned agrees that the Department of Transportation shall withhold from such sum as may be due him/her under the terms of this contract, the costs, as set forth in the specifications, which costs shall be considered and treated not as a penalty but as damages due to the State from the undersigned by reason of the failure of the undersigned to complete the work within the time specified in the contract.

BD 353A (Rev. 3/98)

RETURN WITH BID

4. **ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER.** The undersigned further declares that he/she has carefully examined the proposal, plans, specifications, form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this proposal he/she waives all right to plead any misunderstanding regarding the same.
5. **EXECUTION OF CONTRACT AND CONTRACT BOND.** The undersigned further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, guaranteeing the faithful performance of the work in accordance with the terms of the contract.
6. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

<u>Amount of Bid</u>			<u>Proposal Guaranty</u>	<u>Amount of Bid</u>			<u>Proposal Guaranty</u>
Up to		\$5,000	\$150	\$2,000,000	to	\$3,000,000	\$100,000
\$5,000	to	\$10,000	\$300	\$3,000,000	to	\$5,000,000	\$150,000
\$10,000	to	\$50,000	\$1,000	\$5,000,000	to	\$7,500,000	\$250,000
\$50,000	to	\$100,000	\$3,000	\$7,500,000	to	\$10,000,000	\$400,000
\$100,000	to	\$150,000	\$5,000	\$10,000,000	to	\$15,000,000	\$500,000
\$150,000	to	\$250,000	\$7,500	\$15,000,000	to	\$20,000,000	\$600,000
\$250,000	to	\$500,000	\$12,500	\$20,000,000	to	\$25,000,000	\$700,000
\$500,000	to	\$1,000,000	\$25,000	\$25,000,000	to	\$30,000,000	\$800,000
\$1,000,000	to	\$1,500,000	\$50,000	\$30,000,000	to	\$35,000,000	\$900,000
\$1,500,000	to	\$2,000,000	\$75,000	over		\$35,000,000	\$1,000,000

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the Treasurer, State of Illinois, when the state is awarding authority; the county treasurer, when a county is the awarding authority; or the city, village, or town treasurer, when a city, village, or town is the awarding authority.

If a combination bid is submitted, the proposal guaranties which accompany the individual proposals making up the combination will be considered as also covering the combination bid.

The amount of the proposal guaranty check is _____ \$(). If this proposal is accepted and the undersigned shall fail to execute a contract bond as required herein, it is hereby agreed that the amount of the proposal guaranty shall become the property of the State of Illinois, and shall be considered as payment of damages due to delay and other causes suffered by the State because of the failure to execute said contract and contract bond; otherwise, the bid bond shall become void or the proposal guaranty check shall be returned to the undersigned.

Attach Cashier's Check or Certified Check Here

In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual proposal. If the guaranty check is placed in another proposal, state below where it may be found.

The proposal guaranty check will be found in the proposal for:

Item _____

Section No. _____

County _____

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

BD 354 (Rev. 3/98)

RETURN WITH BID

7. **COMBINATION BIDS.** The undersigned further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual proposal comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

Schedule of Combination Bids

Combination No.	Sections Included in Combination	Combination Bid	
		Dollars	Cents

8. **SCHEDULE OF PRICES.** The undersigned submits herewith his/her schedule of prices covering the work to be performed under this contract; he/she understands that he/she must show in the schedule the unit prices (with no more than two decimal places, i.e. \$25.35, not \$25.348) for which he/she proposes to perform each item of work, that the extensions must be made by him/her, and that if not so done his/her proposal may be rejected as irregular.

The undersigned further agrees that the unit prices submitted herewith are for the purpose of obtaining a gross sum, and for use in computing the value of additions and deductions; that if there is a discrepancy between the gross sum bid and that resulting from the summation of the quantities multiplied by their respective unit prices, the latter shall govern.

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 1

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
A1002406	ACER SACCHARUM 06	EACH	15.000				
A1008106	FRAX AMER AUT PURP 06	EACH	15.000				
B0239583	MALUS PRAIRIE FIRE 12	EACH	15.000				
B1015512	MALUS SNOWDRIFT 12	EACH	15.000				
XX002179	ELCBL C COMM 20 3/C	FOOT	1,271.000				
XX004562	CLASS SI CONC MISC	CU YD	5.000				
X0322674	STROBE LIGHT	EACH	2.000				
X2500250	TEMP EROS CONTR SEED	POUND	320.000				
X4021000	TEMP ACCESS- PRIV ENT	EACH	4.000				
X4022000	TEMP ACCESS- COM ENT	EACH	8.000				
X4066428	BC SC SUPER "D" N90	TON	2,443.000				
X4066618	BCBC SUP IL-19.0 N90	TON	571.000				
X4066745	LEV BIND HM SUPER N90	TON	18.000				
X4066775	LEV BIND MM SUPER N90	TON	2,271.000				
X4067400	QC/QA BITUMINOUS	TON	11,565.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 2

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X5011100	FOUNDATION REM	EACH	1.000				
X6065701	CONC MED TSM4.06	SQ FT	1,335.000				
X8401300	SH P LED 1F 3S BM	EACH	4.000				
X8401310	SH P LED 1F 3S MAM	EACH	6.000				
X8401400	SH P LED 1F 5S MAM	EACH	5.000				
X8401437	SH P LED 2F 1-3,1-5BM	EACH	3.000				
X8401455	SH P LED 2F 5S BM	EACH	1.000				
Z0013798	CONSTRUCTION LAYOUT	L SUM	1.000				
Z0017100	DOWEL BARS	EACH	1,536.000				
Z0028415	GEOTECHNICAL REINF	SQ YD	1,104.000				
Z0028700	GRAN SUBGRADE REPL	CU YD	184.000				
Z0065767	SLOT DR 15"W/1.75" SL	FOOT	617.000				
Z0075300	TIE BARS	EACH	55.000				
20100110	TREE REMOV 6-15	UNIT	377.000				
20100210	TREE REMOV OVER 15	UNIT	175.000				

**ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -**

64569

Page 3

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
20200100	EARTH EXCAVATION	CU YD	25,725.000				
20201400	SUB GRAN MAT A	TON	22,314.000				
20500150	EMBANKMENT	CU YD	4,304.000				
20700600	NON-POROUS GRAN EMB	CU YD	362.000				
20800150	TRENCH BACKFILL	CU YD	146.000				
25000310	SEEDING CL 4	ACRE	1.000				
25000400	NITROGEN FERT NUTR	POUND	484.000				
25000500	PHOSPHORUS FERT NUTR	POUND	426.000				
25000600	POTASSIUM FERT NUTR	POUND	396.000				
25001830	SEEDING CL 6 MOD	ACRE	3.100				
25100115	MULCH METHOD 2	ACRE	3.100				
25100630	EROSION CONTR BLANKET	SQ YD	971.000				
25200100	SODDING	SQ YD	7,911.000				
25200200	SUPPLE WATERING	UNIT	71.000				
28000300	TEMP DITCH CHECKS	EACH	32.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 4

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
28000400	PERIMETER EROS BAR	FOOT	500.000				
28000500	INLET & PIPE PROTECT	EACH	14.000				
28100105	STONE RIPRAP CL A3	SQ YD	1,079.000				
28200100	FILTER FAB FOR RIPRAP	SQ YD	1,079.000				
35101400	AGG BASE CSE B	TON	734.000				
35300500	PCC BSE CSE 10	SQ YD	2,181.000				
35500700	BIT BASE CSE 10	SQ YD	6,033.000				
40600200	BIT MATLS PR CT	TON	8.500				
40600300	AGG PR CT	TON	44.500				
40600870	BIT CON SC "C" CLI T3	TON	1,176.000				
40600980	BIT SURF REM BUTT JT	SQ YD	325.000				
40600990	TEMPORARY RAMP	SQ YD	65.000				
40800040	INCIDENTAL BIT SURF	TON	380.000				
42001200	PAVEMENT FABRIC	SQ YD	407.000				
42300300	PCC DRIVEWAY PAVT 7	SQ YD	411.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 5

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
44000100	PAVEMENT REM	SQ YD	3,542.000				
44000500	COMB CURB GUTTER REM	FOOT	1,733.000				
44002020	CONC MEDIAN SURF REM	SQ FT	833.000				
44002600	GUT OUTLET REM	FOOT	102.000				
44004250	PAVED SHLD REMOVAL	SQ YD	1,773.000				
44200934	CL B PATCH T2 8	SQ YD	598.000				
44200942	CL B PATCH T3 8	SQ YD	187.000				
44200944	CL B PATCH T4 8	SQ YD	187.000				
44200970	CL B PATCH T2 10	SQ YD	100.000				
44200976	CL B PATCH T4 10	SQ YD	33.000				
44213200	SAW CUTS	FOOT	3,455.000				
44300200	STRIP REF CR CON TR	FOOT	7,186.000				
48100100	AGGREGATE SHLDS A	TON	2,119.000				
48101200	AGGREGATE SHLDS B	TON	389.000				
48200410	BIT SHOULDERS 6 1/2	SQ YD	2,557.000				
50100300	REM EXIST STRUCT N1	EACH	1.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 6

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
50100400	REM EXIST STRUCT N2	EACH	1.000				
50100500	REM EXIST STRUCT N3	EACH	1.000				
50104300	CONC HDWL REM	CU YD	10.000				
50105200	REM EXIST CULVERTS	EACH	12.000				
50800105	REINFORCEMENT BARS	POUND	320.000				
54001000	BOX CUL END SECT	EACH	4.000				
54010503	PCBC 5X3	FOOT	37.000				
54010903	PCBC 9X3	FOOT	32.000				
542A0229	P CUL CL A 1 24	FOOT	70.000				
542A0235	P CUL CL A 1 30	FOOT	9.000				
542A1069	P CUL CL A 2 24	FOOT	481.000				
542D0220	P CUL CL D 1 15	FOOT	194.000				
542D0223	P CUL CL D 1 18	FOOT	128.000				
54213450	END SECTIONS 15	EACH	10.000				
54213453	END SECTIONS 18	EACH	6.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 7

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
54213657	PRC FLAR END SEC 12	EACH	1.000				
54213660	PRC FLAR END SEC 15	EACH	2.000				
54213669	PRC FLAR END SEC 24	EACH	1.000				
54244905	INLET BOX 542501 SPL	EACH	1.000				
54248510	CONCRETE COLLAR	CU YD	4.100				
550A0050	STORM SEW CL A 1 12	FOOT	70.000				
550A0340	STORM SEW CL A 2 12	FOOT	2,433.000				
550A0360	STORM SEW CL A 2 15	FOOT	269.000				
550A0410	STORM SEW CL A 2 24	FOOT	155.000				
55100900	STORM SEWER REM 18	FOOT	227.000				
60221100	MAN TA 5 DIA T1F CL	EACH	2.000				
60223800	MAN TA 6 DIA T1F CL	EACH	2.000				
60242400	INLETS SPL	EACH	20.000				
60242600	INLETS SPL N2	EACH	4.000				
60246805	MED INLET (604106)	EACH	4.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 8

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
60255500	MAN ADJUST	EACH	3.000				
60262800	INLETS RECONST SPL	EACH	2.000				
60500060	REMOV INLETS	EACH	2.000				
60600095	CLASS SI CONC OUTLET	CU YD	2.000				
60604400	COMB CC&G TB6.18	FOOT	171.000				
60605000	COMB CC&G TB6.24	FOOT	4,166.000				
60608600	COMB CC&G TM6.06	FOOT	248.000				
60611815	COMB CC&G TM SPL	FOOT	928.000				
60618300	CONC MEDIAN SURF 4	SQ FT	651.000				
60618320	CONC MEDIAN SURF 6	SQ FT	4,885.000				
60621900	CONC MED TSM SPL	SQ FT	1,933.000				
60624600	CORRUGATED MED	SQ FT	230.000				
63500105	DELINEATORS	EACH	14.000				
66600105	FUR ERECT ROW MARKERS	EACH	47.000				
67000400	ENGR FIELD OFFICE A	CAL MO	6.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 9

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
67100100	MOBILIZATION	L SUM	1.000				
70100450	TRAF CONT-PROT 701201	L SUM	1.000				
70100460	TRAF CONT-PROT 701306	L SUM	1.000				
70100500	TRAF CONT-PROT 701326	L SUM	1.000				
70100700	TRAF CONT-PROT 701406	L SUM	1.000				
70102635	TR CONT & PROT 701701	L SUM	1.000				
70300100	SHORT-TERM PAVT MKING	FOOT	2,174.000				
70301000	WORK ZONE PAVT MK REM	SQ FT	240.000				
72000100	SIGN PANEL T1	SQ FT	30.000				
72000200	SIGN PANEL T2	SQ FT	46.000				
78000100	THPL PVT MK LTR & SYM	SQ FT	621.000				
78000200	THPL PVT MK LINE 4	FOOT	22,080.000				
78000500	THPL PVT MK LINE 8	FOOT	2,589.000				
78000600	THPL PVT MK LINE 12	FOOT	1,687.000				
78000650	THPL PVT MK LINE 24	FOOT	270.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 10

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
78003110	PREF PL PM TB LINE 4	FOOT	629.000				
78100100	RAISED REFL PAVT MKR	EACH	58.000				
78300200	RAISED REF PVT MK REM	EACH	54.000				
81012300	CON T 1 PVC	FOOT	608.000				
81012400	CON T 1 1/4 PVC	FOOT	1,045.000				
81012600	CON T 2 PVC	FOOT	232.000				
81012700	CON T 2 1/2 PVC	FOOT	131.000				
81013000	CON T 4 PVC	FOOT	205.000				
81021330	CON P 2 PVC	FOOT	164.000				
81021370	CON P 4 PVC	FOOT	417.000				
81400400	CONC HANDHOLE	EACH	9.000				
81400600	CONC DBL HANDHOLE	EACH	1.000				
82401210	ELCBL C SIGNAL 14 2C	FOOT	1,907.000				
82401240	ELCBL C SIGNAL 14 5C	FOOT	3,944.000				
82401250	ELCBL C SIGNAL 14 7C	FOOT	3,291.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER -

64569

Page 11

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
82401510	ELCBL C LEAD 18 3PR	FOOT	3,652.000				
82401800	ELCBL C SERV 6 2C	FOOT	57.000				
83202490	TS POST GALVS 15	EACH	8.000				
83400320	S MAA & P 55	EACH	4.000				
83800100	CONC FDN TY A	FOOT	24.000				
83800200	CONC FDN TY D	FOOT	4.000				
83800400	CONC FDN TY E 30D	FOOT	68.000				
84200400	TS BACKPLATE F PLAST	EACH	23.000				
84600100	INDUCTIVE LOOP DETECT	EACH	12.000				
84700100	DET LOOP T1	FOOT	1,801.000				
84900100	TEMP TR SIG INSTALL	EACH	1.000				
85200200	LIGHT DETECTOR	EACH	4.000				
85200300	LIGHT DETECTOR AMP	EACH	4.000				
85700200	FAC T4 CAB	EACH	1.000				
86700100	SERV INSTALL TY A	EACH	1.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 64569

Page 12

State Job # - C-92-022-01
PPS NBR - 2-15060-0000
County Name - WINNEBAGO - -
Code - 201 - -
District - 2 - -
Section Number - 40R-1-M-2

Project Number
ACNHF-ACHS-0301/019/000

Route
FAP 301

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
86800100	TR & BKFIL F ELECT WK	FOOT	2,221.000				

CONTRACT NUMBER

64569

THIS IS THE TOTAL BID \$ _____

NOTES:

- 1. Each PAY ITEM should have a UNIT PRICE and a TOTAL PRICE.**
- 2. The UNIT PRICE shall govern if no TOTAL PRICE is shown or if there is a discrepancy between the product of the UNIT PRICE multiplied by the QUANTITY.**
- 3. If a UNIT PRICE is omitted, the TOTAL PRICE will be divided by the QUANTITY in order to establish a UNIT PRICE.**
- 4. A bid may be declared UNACCEPTABLE if neither a unit price nor a total price is shown.**

RETURN WITH BID

STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

I. GENERAL

A. Article 50 of the Illinois Procurement Code establishes the duty of all State chief procurement officers, State purchasing officers, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.

B. In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. By execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances has been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.

C. In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for termination of the contract and the suspension or debarment of the bidder.

II. ASSURANCES

A. The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous assurance, and the surety providing the performance bond shall be responsible for the completion of the contract.

B. Felons

1. The Illinois Procurement Code provides:

Section 50-10. Felons. Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any state agency from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-10.

C. Conflicts of Interest

1. The Illinois Procurement Code provides in pertinent part:

Section 50-13. Conflicts of Interest.

(a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois Toll Highway authority.

(b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.

(e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 days after the officer, member, or employee takes office or is employed.

The current salary of the Governor is \$150,700.00. Sixty percent of the salary is \$90,420.00.

RETURN WITH BID

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code and Executive Order Number 3 (1998). Information concerning the exemption process is available from the Department upon request.

D. Negotiations

1. The Illinois Procurement Code provides in pertinent part:

Section 50-15. Negotiations.

(a) It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

E. Inducements

1. The Illinois Procurement Code provides:

Section 50-25. Inducement. Any person who offers or pays any money or other valuable thing to any person to induce him or her not to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract or who withholds a bid in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

F. Revolving Door Prohibition

1. The Illinois Procurement Code provides:

Section 50-30. Revolving door prohibition. Chief procurement officers, associate procurement officers, State purchasing officers, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

G. Reporting Anticompetitive Practices

1. The Illinois Procurement Code provides:

Section 50-40. Reporting anticompetitive practices. When, for any reason, any vendor, bidder, contractor, chief procurement officer, State purchasing officer, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the chief procurement officer.

2. The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid is submitted.

H. Confidentiality

1. The Illinois Procurement Code provides:

Section 50-45. Confidentiality. Any chief procurement officer, State purchasing officer, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

2. The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

RETURN WITH BID

I. Insider Information

1. The Illinois Procurement Act provides:

Section 50-50. Insider information. It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

2. The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

III. CERTIFICATIONS

A. The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous certification, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Bribery

1. The Illinois Procurement Code provides:

Section 50-5. Bribery.

- (a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:

(1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or

(2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.

- (b) Businesses. No business shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:

(1) the business has been finally adjudicated not guilty; or

(2) the business demonstrates to the governmental entity with which it seeks to contract, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 1961.

- (c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.

- (d) Certification. Every bid submitted to and contract executed by the State shall contain a certification by the contractor that the contractor is not barred from being awarded a contract or subcontract under this Section. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

2. The bidder certifies that it is not barred from being awarded a contract under Section 50.5.

C. Educational Loan

1. Section 3 of the Educational Loan Default Act provides:

§ 3. No State agency shall contract with an individual for goods or services if that individual is in default, as defined in Section 2 of this Act, on an educational loan. Any contract used by any State agency shall include a statement certifying that the individual is not in default on an educational loan as provided in this Section.

2. The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

D. Bid-Rigging/Bid Rotating

1. Section 33E-11 of the Criminal Code of 1961 provides:

§ 33E-11. (a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article. The State and units of local government shall provide the appropriate forms for such certification.

RETURN WITH BID

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

2. The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4.

E. International Anti-Boycott

1. Section 5 of the International Anti-Boycott Certification Act provides:

§ 5. State contracts. Every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.

2. The bidder makes the certification set forth in Section 5 of the Act.

F. Drug Free Workplace

1. The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.

2. The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace by:

(a) Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the contractor's workplace; specifying the actions that will be taken against employees for violations of such prohibition; and notifying the employee that, as a condition of employment on such contract, the employee shall abide by the terms of the statement, and notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.

(b) Establishing a drug free awareness program to inform employees about the dangers of drug abuse in the workplace; the contractor's policy of maintaining a drug free workplace; any available drug counseling, rehabilitation, and employee assistance programs; and the penalties that may be imposed upon employees for drug violations.

(c) Providing a copy of the statement required by subparagraph (1) to each employee engaged in the performance of the contract and to post the statement in a prominent place in the workplace.

(d) Notifying the Department within ten (10) days after receiving notice from an employee or otherwise receiving actual notice of the conviction of an employee for a violation of any criminal drug statute occurring in the workplace.

(e) Imposing or requiring, within 30 days after receiving notice from an employee of a conviction or actual notice of such a conviction, an appropriate personnel action, up to and including termination, or the satisfactory participation in a drug abuse assistance or rehabilitation program approved by a federal, state or local health, law enforcement or other appropriate agency.

(f) Assisting employees in selecting a course of action in the event drug counseling, treatment, and rehabilitation is required and indicating that a trained referral team is in place.

(g) Making a good faith effort to continue to maintain a drug free workplace through implementation of the actions and efforts stated in this certification.

TO BE RETURNED WITH BID

IV. DISCLOSURES

A. The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous disclosure, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Illinois Procurement Code provides that all bids of more than \$10,000 shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each person making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each person making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. **Disclosure Forms.** Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. Subject individuals should be covered each by one form. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies. **The forms must be included with each bid or incorporated by reference.**

C. Disclosure Form Instructions

Form A: For bidders that have previously submitted the information requested in Form A

The Department has retained the Form A disclosures submitted by all bidders responding to these requirements for the April 24, 1998 or any subsequent letting conducted by the Department. The bidder has the option of submitting the information again or the bidder may sign the following certification statement indicating that the information previously submitted by the bidder is, as of the date of signature, current and accurate. The Certification must be signed and dated by a person who is authorized to execute contracts for the bidding company. Before signing this certification, the bidder should carefully review its prior submissions to ensure the Certification is correct. If the Bidder signs the Certification, the Bidder should proceed to Form B instructions.

CERTIFICATION STATEMENT

I have determined that the Form A disclosure information previously submitted is current and accurate, and all forms are hereby incorporated by reference in this bid. Any necessary additional forms or amendments to previously submitted forms are attached to this bid.

(Bidding Company)

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative

Date

Form A: For bidders who have NOT previously submitted the information requested in Form A

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the NOT APPLICABLE STATEMENT on the second page of Form A must be signed and dated by a person that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be completed.

1. Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES ☐ NO ☐
2. Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than \$90,420.00? YES ☐ NO ☐
3. Does anyone in your organization receive more than \$90,420.00 of the bidding entity's or parent entity's distributive income? (Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.) YES ☐ NO ☐
4. Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than \$90,420.00? YES ☐ NO ☐

(Note: Only one set of forms needs to be completed per person per bid even if a specific individual would require a yes answer to more than one question.)

A "YES" answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or the bidding entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by a person that is authorized to execute contracts for your organization. **Photocopied or stamped signatures are not acceptable.** The person signing can be, but does not have to be, the person for which the form is being completed. The bidder is responsible for the accuracy of any information provided.

If the answer to each of the above questions is "NO", then the NOT APPLICABLE STATEMENT on page 2 of Form A must be signed and dated by a person that is authorized to execute contracts for your company.

Form B: Identifying Other Contracts & Procurement Related Information Disclosure Form B must be completed for each bid submitted by the bidding entity. It must be signed by an individual who is authorized to execute contracts for the bidding entity. Note: Signing the NOT APPLICABLE STATEMENT on Form A does not allow the bidder to ignore Form B. Form B must be completed, signed and dated or the bidder may be considered nonresponsive and the bid will not be accepted.

The Bidder shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the signature box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:

Option I: If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an attached sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts and are not to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development Board must be included. Bidders who submit Affidavits of Availability are suggested to use Option II.

Option II: If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type "See Affidavit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the Affidavit of Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.

D. Bidders Submitting More Than One Bid

Bidders submitting multiple bids may submit one set of forms consisting of all required Form A disclosures and one Form B for use with all bids. Please indicate in the space provided below the bid item that contains the original disclosure forms and the bid items which incorporate the forms by reference.

- The bid submitted for letting item _____ contains the Form A disclosures or Certification Statement and the Form B disclosures. The following letting items incorporate the said forms by reference:

ILLINOIS DEPARTMENT
OF TRANSPORTATIONForm A
Financial Information &
Potential Conflicts of Interest
Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)

Disclosure of the information contained in this Form is required by the Section 50-35 of the Illinois Procurement Code (30 ILCS 500). Vendors desiring to enter into a contract with the State of Illinois must disclose the financial information and potential conflict of interest information as specified in this Disclosure Form. This information shall become part of the publicly available contract file. This Form A must be completed for bids in excess of \$10,000, and for all open-ended contracts. **A publicly traded company may submit a 10K disclosure (or equivalent if applicable) in satisfaction of the requirements set forth in Form A. See Disclosure Form Instructions.**

DISCLOSURE OF FINANCIAL INFORMATION

1. Disclosure of Financial Information. The individual named below has an interest in the BIDDER (or its parent) in terms of ownership or distributive income share in excess of 5%, or an interest which has a value of more than \$90,420.00 (60% of the Governor's salary as of 7/1/01). **(Make copies of this form as necessary and attach a separate Disclosure Form A for each individual meeting these requirements)**

FOR INDIVIDUAL (type or print information)

NAME: _____

ADDRESS _____

Type of ownership/distributable income share:

stock _____ sole proprietorship _____ partnership _____ other: (explain on separate sheet):
 % or \$ value of ownership/distributable income share: _____

2. Disclosure of Potential Conflicts of Interest. Check "Yes" or "No" to indicate which, if any, of the following potential conflict of interest relationships apply. If the answer to any question is "Yes", please attach additional pages and describe.

(a) State employment, currently or in the previous 3 years, including contractual employment of services.

Yes ___ No ___

If your answer is yes, please answer each of the following questions.

- Are you currently an officer or employee of either the Capitol Development Board or the Illinois Toll Highway Authority? Yes ___ No ___
- Are you currently appointed to or employed by any agency of the State of Illinois? If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) provide the name the State agency for which you are employed and your annual salary. _____

RETURN WITH BID/OFFER

3. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of the salary of the Governor? Yes ___ No ___
4. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you and your spouse or minor children entitled to receive (i) more than 15% in aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 2 times the salary of the Governor? Yes ___ No ___

(b) State employment of spouse, father, mother, son, or daughter, including contractual employment for services in the previous 2 years.

Yes ___ No ___

If your answer is yes, please answer each of the following questions.

1. Is your spouse or any minor children currently an officer or employee of the Capitol Development Board or the Illinois Toll Highway Authority? Yes ___ No ___
2. Is your spouse or any minor children currently appointed to or employed by any agency of the State of Illinois? If your spouse or minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) provide the name of the spouse and/or minor children, the name of the State agency for which he/she is employed and his/her annual salary. _____
3. If your spouse or any minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the salary of the Governor as of 7/1/01) are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of the salary of the Governor? Yes ___ No ___
4. If your spouse or any minor children are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you and your spouse or any minor children entitled to receive (i) more than 15% in the aggregate of the total distributable income from your firm, partnership, association or corporation, or (ii) an amount in excess of 2 times the salary of the Governor? Yes ___ No ___

(c) Elective status; the holding of elective office of the State of Illinois, the government of the United States, any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois currently or in the previous 3 years. Yes ___ No ___

(d) Relationship to anyone holding elective office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(e) Appointive office; the holding of any appointive government office of the State of Illinois, the United State of America, or any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois, which office entitles the holder to compensation in excess of the expenses incurred in the discharge of that office currently or in the previous 3 years. Yes ___ No ___

(f) Relationship to anyone holding appointive office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(g) Employment, currently or in the previous 3 years, as or by any registered lobbyist of the State government. Yes ___ No ___

RETURN WITH BID/OFFER

(h) Relationship to anyone who is or was a registered lobbyist in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(i) Compensated employment, currently or in the previous 3 years, by any registered election or reelection committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

(j) Relationship to anyone; spouse, father, mother, son, or daughter; who was a compensated employee in the last 2 years by any registered election or re-election committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

APPLICABLE STATEMENT

This Disclosure Form A is submitted on behalf of the INDIVIDUAL named on previous page.

Completed by:

Name of Authorized Representative (type or print)

Completed by:

Title of Authorized Representative (type or print)

Completed by:

Signature of Individual or Authorized Representative

Date

NOT APPLICABLE STATEMENT

I have determined that no individuals associated with this organization meet the criteria that would require the completion of this Form A.

This Disclosure Form A is submitted on behalf of the CONTRACTOR listed on the previous page.

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative

Date

RETURN WITH BID/OFFER

ILLINOIS DEPARTMENT
OF TRANSPORTATION

Form B
Other Contracts &
Procurement Related Information
Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)

Disclosure of the information contained in this Form is required by the Section 50-35 of the Illinois Procurement Act (30 ILCS 500). This information shall become part of the publicly available contract file. This Form B must be completed for bids in excess of \$10,000, and for all open-ended contracts.

DISCLOSURE OF OTHER CONTRACTS AND PROCUREMENT RELATED INFORMATION

1. Identifying Other Contracts & Procurement Related Information. The BIDDER shall identify whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other State of Illinois agency: Yes ___ No ___

If **"No"** is checked, the bidder only needs to complete the signature box on the bottom of this page.

2. If "Yes" is checked. Identify each such relationship by showing State of Illinois agency name and other descriptive information such as bid or project number (attach additional pages as necessary). SEE DISCLOSURE FORM INSTRUCTIONS:

THE FOLLOWING STATEMENT MUST BE SIGNED

_____ Name of Authorized Representative (type or print)	
_____ Title of Authorized Representative (type or print)	
_____ Signature of Authorized Representative	_____ Date

RETURN WITH BID

SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights' Rules and Regulations are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Section 7.2 of the Illinois Department of Human Rights' Rules and Regulations for Public Contracts adopted as amended on September 17, 1980. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.

PART II. WORKFORCE PROJECTION - continued

- B. Included in "Total Employees" under Table A is the total number of **new hires** that would be employed in the event the undersigned bidder is awarded this contract.

The undersigned bidder projects that: (number) _____ new hires would be recruited from the area in which the contract project is located; and/or (number) _____ new hires would be recruited from the area in which the bidder's principal office or base of operation is located.

- C. Included in "Total Employees" under Table A is a projection of numbers of persons to be employed directly by the undersigned bidder as well as a projection of numbers of persons to be employed by subcontractors.

The undersigned bidder estimates that (number) _____ persons will be directly employed by the prime contractor and that (number) _____ persons will be employed by subcontractors.

PART III. AFFIRMATIVE ACTION PLAN

- A. The undersigned bidder understands and agrees that in the event the foregoing minority and female employee utilization projection included under **PART II** is determined to be an underutilization of minority persons or women in any job category, and in the event that the undersigned bidder is awarded this contract, he/she will, prior to commencement of work, develop and submit a written Affirmative Action Plan including a specific timetable (geared to the completion stages of the contract) whereby deficiencies in minority and/or female employee utilization are corrected. Such Affirmative Action Plan will be subject to approval by the contracting agency and the **Department of Human Rights**.
- B. The undersigned bidder understands and agrees that the minority and female employee utilization projection submitted herein, and the goals and timetable included under an Affirmative Action Plan if required, are deemed to be part of the contract specifications.

Company _____

Telephone Number _____

Address _____

NOTICE REGARDING SIGNATURE

The Bidder's signature on the Proposal Signature Sheet will constitute the signing of this form. The following signature block needs to be completed only if revisions are required.

Signature: _____ Title: _____ Date: _____

Instructions: All tables must include subcontractor personnel in addition to prime contractor personnel.

Table A - Include both the number of employees that would be hired to perform the contract work and the total number currently employed (Table B) that will be allocated to contract work, and include all apprentices and on-the-job trainees. The "Total Employees" column should include all employees including all minorities, apprentices and on-the-job trainees to be employed on the contract work.

Table B - Include all employees currently employed that will be allocated to the contract work including any apprentices and on-the-job trainees currently employed.

Table C - Indicate the racial breakdown of the total apprentices and on-the-job trainees shown in Table A.

ADDITIONAL FEDERAL REQUIREMENTS

In addition to the Required Contract Provisions for Federal-Aid Construction Contracts (FHWA 1273), all bidders make the following certifications.

- A. By the execution of this proposal, the signing bidder certifies that the bidding entity has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action, in restraint of free competitive bidding in connection with the submitted bid. This statement made by the undersigned bidder is true and correct under penalty of perjury under the laws of the United States.
- B. CERTIFICATION, EQUAL EMPLOYMENT OPPORTUNITY:
1. Have you participated in any previous contracts or subcontracts subject to the equal opportunity clause. YES _____ NO _____
 2. If answer to #1 is yes, have you filed with the Joint Reporting Committee, the Director of OFCC, any Federal agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements of those organizations? YES _____ NO _____

RETURN WITH BID**Contract No. 64569
Winnebago County
Section 40R-1-M-2
Project ACNHF-ACHS-301(19)
FAP Route 301
District 2 Construction Funds**PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 4 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

(IF AN INDIVIDUAL)

Firm Name _____

Signature of Owner _____

Business Address _____

(IF A CO-PARTNERSHIP)

Firm Name _____

By _____

Business Address _____

Name and Address of All Members of the Firm:

(IF A CORPORATION)

Corporate Name _____

By _____

Signature of Authorized Representative _____

Typed or printed name and title of Authorized Representative _____

Attest _____

(IF A JOINT VENTURE, USE THIS SECTION
FOR THE MANAGING PARTY AND THE
SECOND PARTY SHOULD SIGN BELOW)

Business Address _____

(IF A JOINT VENTURE)

Corporate Name _____

By _____

Signature of Authorized Representative _____

Typed or printed name and title of Authorized Representative _____

Attest _____

Signature _____

Business Address _____

If more than two parties are in the joint venture, please attach an additional signature sheet.

RETURN WITH BID



Illinois Department
of Transportation

Division of Highways
Proposal Bid Bond
(Effective November 1, 1992)

Item No. _____
Letting Date _____

KNOW ALL MEN BY THESE PRESENTS, That We _____

as PRINCIPAL, and _____

_____ as SURETY, are held jointly, severally and firmly bound unto the STATE OF ILLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in Article 102.09 of the "Standard Specifications for Road and Bridge Construction" in effect on the date of invitation for bids, whichever is the lesser sum, well and truly to be paid unto said STATE OF ILLINOIS, for the payment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.

THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH, That Whereas, the PRINCIPAL has submitted a bid proposal to the STATE OF ILLINOIS, acting through the Department of Transportation, for the improvement designated by the Transportation Bulletin Item Number and Letting Date indicated above.

NOW, THEREFORE, if the Department shall accept the bid proposal of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in the bidding and contract documents, submit a DBE Utilization Plan that is accepted and approved by the Department; and if, after award by the Department, the PRINCIPAL shall enter into a contract in accordance with the terms of the bidding and contract documents including evidence of the required insurance coverages and providing such bond as specified with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof; or if, in the event of the failure of the PRINCIPAL to make the required DBE submission or to enter into such contract and to give the specified bond, the PRINCIPAL pays to the Department the difference not to exceed the penalty hereof between the amount specified in the bid proposal and such larger amount for which the Department may contract with another party to perform the work covered by said bid proposal, then this obligation shall be null and void, otherwise, it shall remain in full force and effect.

IN THE EVENT the Department determines the PRINCIPAL has failed to comply with any requirement as set forth in the preceding paragraph, then Surety shall pay the penal sum to the Department within fifteen (15) days of written demand therefor. If Surety does not make full payment within such period of time, the Department may bring an action to collect the amount owed. Surety is liable to the Department for all its expenses, including attorney's fees, incurred in any litigation in which it prevails either in whole or in part.

In TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this _____ day of _____ A.D., _____.

PRINCIPAL

SURETY

(Company Name)

(Company Name)

By: _____ By: _____
(Signature & Title) (Signature of Attorney-in-Fact)

Notary Certification for Principal and Surety

STATE OF ILLINOIS,
COUNTY OF _____

I, _____, a Notary Public in and for said County, do hereby certify that
_____ and _____

(Insert names of individuals signing on behalf of PRINCIPAL & SURETY)

who are each personally known to me to be the same persons whose names are subscribed to the foregoing instrument on behalf of PRINCIPAL and SURETY, appeared before me this day in person and acknowledged respectively, that they signed and delivered said instrument as their free and voluntary act for the uses and purposes therein set forth.

Given under my hand and notarial seal this _____ day of _____, A.D. _____.

My commission expires _____
Notary Public

In lieu of completing the above section of the Proposal Bid Form, the Principal may file an Electronic Bid Bond. By signing below the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the State of Illinois under the conditions of the bid bond as shown above.

Electronic Bid Bond ID# _____ Company/Bidder Name _____ Signature and Title _____

PROPOSAL ENVELOPE



PROPOSALS

for construction work advertised for bids by the
Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

Name:
Address:
Phone No.

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 323
Illinois Department of Transportation
2300 South Dirksen Parkway
Springfield, Illinois 62764

CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS

NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

Contract No. 64569
Winnebago County
Section 40R-1-M-2
Project ACNHF-ACHS-301(19)
FAP Route 301
District 2 Construction Funds



Illinois Department of Transportation



1. TIME AND PLACE OF OPENING BIDS. Sealed proposals for the improvement described herein will be received by the Department of Transportation at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 o'clock a.m., November 9, 2001. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after the 10:00 a.m. cut off time.

2. DESCRIPTION OF WORK. (a) The proposed improvement is officially known as:

**Contract No. 64569
Winnebago County
Section 40R-1-M-2
Project ACNHF-ACHS-301(19)
FAP Route 301
District 2 Construction Funds**

(b) The proposed improvement, shown in detail on the plans issued by the Department or on the location sketch, schedule and detail sheets included herein, includes, in general, the following described work:

Traffic signals and intersection channelization at US Route 20 and Winnebago Road located north of Winnebago.

3. INSTRUCTIONS TO BIDDERS. (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.07 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.

(b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.

4. AWARD CRITERIA AND REJECTION OF BIDS. This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the proposal and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the
Illinois Department of Transportation

Kirk Brown, Secretary

BD 351 (Rev. 3/98)

INDEX FOR
SUPPLEMENTAL SPECIFICATIONS
AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2001

This sheet contains a listing of SUPPLEMENTAL SPECIFICATIONS, frequently used RECURRING SPECIAL PROVISIONS and LOCAL AGENCY SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopt. 1-1-1997) (Rev. 1-1-2001)

SUPPLEMENTAL SPECIFICATIONS

<u>Std. Spec. Sec.</u>	<u>Page</u> <u>No.</u>
102 Bidding Requirements and Conditions	1
103 Award and Execution of Contract	2
104 Scope of Work	3
107 Legal Regulations and Responsibility to Public	4
108 Prosecution and Progress	6
109 Measurement and Payment	7
202 Earth and Rock Excavation	9
251 Mulch	10
252 Sodding	11
253 Planting Woody Plants	12
280 Temporary Erosion Control	13
281 Riprap	15
311 Granular Subbase	16
312 Stabilized Subbase	17
355 Bituminous Base Course	18
402 Aggregate Surface Course	19
403 Bituminous Surface Treatment (Class A-1, A-2, A-3)	20
404 Bituminous Surface Road Mix (Class B)	21
405 Bituminous Surface Plant Mix (Class B)	22
406 Bituminous Concrete Binder and Surface Course Class I	23
420 Portland Cement Concrete Pavement	25
442 Pavement Patching	26
445 Open Graded Asphalt Friction Course	28
481 Aggregate Shoulders	29
483 Portland Cement Concrete Shoulders	30
501 Removal of Existing Structures	31
502 Excavation for Structures	32
503 Concrete Structures	33
505 Steel Structures	35
506 Cleaning and Painting	59
507 Timber Structures	64
512 Piling	65
540 Box Culverts	66
543 Insertion Lining of Pipe Culverts	67
582 Bituminous Concrete Surfacing on Bridge Decks	69
601 Pipe Drains, Underdrains and French Drains	70
606 Concrete Gutter, Curb, Median, and Paved Ditch	71
611 Treatment of Existing Field Tile Systems	72
661 Bituminous Shoulder Curb	73
669 Removal and Disposal of Regulated Substances	74
701 Work Zone Traffic Control	84
703 Work Zone Pavement Marking	86
781 Raised Reflective Pavement Markers	87
783 Pavement Marking and Marker Removal	88
810 Underground Raceways	89
813 Junction and Pull Boxes	90
814 Handhole	91
851 Paint Existing Traffic Signal Equipment	92

<u>Std. Spec. Sec.</u>	<u>Page No.</u>
865 Breakaway Devices	93
1001 Portland Cement or Blended Hydraulic Cement	94
1003 Fine Aggregates	95
1004 Coarse Aggregate	97
1005 Stone, Concrete Blocks and Broken Concrete for Erosion Protection, Sediment Control, and Rockfill	98
1006 Metals	99
1009 Bituminous Materials	100
1020 Portland Cement Concrete	103
1040 Drain Pipe, Tile, Tubing, Drainage Mat, and Wall Drain	105
1050 Poured Joint Sealers	107
1052 Neoprene Expansion Joint	108
1060 Waterproofing Materials	109
1061 Waterproofing Membrane System	110
1062 Reflective Crack Control System	111
1080 Fabric Materials	112
1081 Materials For Planting	113
1085 Electric Materials	116
1090 Sign Base	117
1091 Sign Face	118
1095 Pavement Markings	119
1096 Pavement Markers	120
1101 General Equipment	121
1103 Portland Cement Concrete Equipment	122

RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

<u>CHECK SHEET #</u>		<u>PAGE NO.</u>
1	R.R. Protection Liability Form (Eff. 6-10-58) (Rev. 9-29-67)	123
2	X State Required Contract Provisions All Federal - aid Construction Contracts (Eff. 2-1-69) (Rev. 10-1-83)	134
3	Specific Equal Employment Opportunity Responsibilities NonFederal - aid Contracts (Eff. 3-20-69) (Rev. 1-1-94)	136
4	Required Provisions - State Contracts (Eff. 4-1-65) (Rev. 4-1-93)	140
5	X Asphalt Quantities and Cost Reviews (Eff. 7-1-88)	143
6	X Subletting of Contracts (Federal-aid Contracts) (Eff. 1-1-88) (Rev. 5-1-93)	144
7	National Pollutant Discharge Elimination System Permit (Eff. 7-1-94)	145
8	Grading and Shaping Ditches (Eff. 5-1-93)	146
9	Earthwork (Eff. 7-1-94) (Rev. 2-1-95)	147
10	Construction Layout Stakes Except for Bridges (Eff. 5-1-93) (Rev. 8-1-93)	148
11	X Construction Layout Stakes (Eff. 5-1-93) (Rev. 8-1-93)	150
12	Controlled Low - Strength Material (CLSM) (Eff. 1-1-90) (Rev. 1-1-99)	152
13	Use of Geotextile Fabric for Railroad Crossing (Eff. 1-1-95) (Rev. 1-1-97)	155
14	Erosion Control Fiber Blanket (Eff. 3-1-91) (Rev. 7-1-96)	156
15	Bituminous Surface Removal (Coldmilling) (Eff. 11-1-87) (Rev. 10-15-97)	158
16	Bituminous Surface Treatments Half - Smart (Eff. 7-1-93) (Rev. 1-1-97)	160
17	Subsealing of Concrete Pavements (Eff. 11-1-84) (Rev. 2-1-97)	164
18	Asphaltic Emulsion Slurry Seal and Fibrated Asphaltic Emulsion Slurry Seal (Eff. 8-1-89) (Rev. 02-01-97)	166
19	Polymer Modified Emulsified Asphalt (Eff. 5-15-89)	171
20	Reserved	173
21	Reserved	173
22	Reserved	173
23	Patching with Bituminous Overlay Removal (Eff. 10-1-95) (Rev. 7-1-99)	174
24	Haul Road Stream Crossings, Other Temporary Stream Crossings, and In-Stream Work Pads (Eff. 1-2-92) (Rev. 1-1-98)	175
25	Protective Shield System (Eff. 4-1-95) (Rev. 8-1-95)	176
26	Pipe Underdrains (Eff. 9-9-87) (Rev. 1-1-98)	177
27	Reserved	178
28	Reserved	178
29	Traffic Barrier Terminal Type 3B (QuadGuard) (Eff. 10-1-86) (Rev.10-15-97)	179
30	Reserved	180
31	X Give em a Brake Sign (Eff. 8-1-89) (Rev. 08-1-91)	181
32	Portable Changeable Message Signs (Eff. 11-1-93) (Rev. 2-1-96)	182
33	Reserved	183
34	X Aggregate Gradation Control System (Eff. 7-1-95)	184
35	Traffic Barrier Terminal Type 3 or 3A (Eff. 10-1-96)	185
36	Bicycle Racks (Eff. 4-1-94) (Rev. 1-1-97)	186
37	Reserved	188
38	Guardrail and Barrier Wall Delineation (Eff. 12-15-93) (Rev. 1-1-97)	189
39	Reserved	192
40	X Epoxy Coating on Reinforcement (Eff. 4-1-97) (Rev. 7-15-97)	193
41	Resurfacing of Milled Surfaces (Eff. 10-1-95)	194
42	Reserved	195
43	X EEO (Eff. 7-21-78) (Rev. 11-18-80)	196
44	Corrosion Inhibitor (Eff. 3-1-90) (Rev. 1-1-98)	203
45	Night Time Inspection of Roadway Lighting (Eff. 5-1-96)	204
46	PCC Partial Depth Bituminous Patching (Eff. 1-1-98)	205
47	Reserved	207
48	Reserved	207
49	Reserved	207
50	X Quality Control/Quality Assurance of Bituminous Concrete Mixtures (Eff. 1-1-99) (Rev. 1-1-00)	208
51	X Direction Indicator Barricades (Eff. 7-1-99)	221

TABLE OF CONTENTS

LOCATION OF PROJECT	1
DESCRIPTION OF PROJECT	1
TRAFFIC CONTROL PLAN	1
BITUMINOUS CONCRETE COURSES CLASS I, TYPE 3 MIXTURE C AND MIXTURE CL	4
REMOVE EXISTING CULVERTS	4
GEOTECHNICAL REINFORCEMENT	5
SEEDING, CLASS 6 (MODIFIED)	7
ELECTRIC CABLE IN CONDUIT, SIGNAL, NO. 20 3C	7
FULL-ACTUATED CONTROLLER AND TYPE IV CABINET	8
STROBE LIGHT	8
LIGHT DETECTOR AMPLIFIER	9
SIGNAL HEADS, LIGHT EMITTING DIODE	9
TEMPORARY TRAFFIC SIGNAL INSTALLATION	14
ADJUSTING FRAMES AND GRATES (BDE)	15
AGGREGATE SHOULDERS (BDE)	18
AGGREGATE SURFACE COURSE FOR TEMPORARY ACCESS (BDE)	19
BIDDING REQUIREMENTS AND CONDITIONS (BDE)	21
BITUMINOUS CONCRETE SURFACE COURSE	22
CONSTRUCTION FOR CEMENT PROCESSING ADDITIONS (BDE)	23
COARSE AGGREGATE FOR BITUMINOUS COURSES (BDE)	24
COARSE AGGREGATE FOR TRENCH BACKFILL, BACKFILL AND BEDDING (BDE)	26
CONCRETE MIX DESIGN CRITERIA (BDE)	32
EROSION AND SEDIMENT CONTROL DEFICIENCY DEDUCTION (BDE)	32
FINE AGGREGATE FOR PORTLAND CEMENT CONCRETE AND MORTAR (BDE)	33
FLY ASH IN PORTLAND CEMENT CONCRETE (BDE)	34
GRADATION FOR FINE AND COARSE AGGREGATES	35
GROUND GRANULATED BLAST-FURNACE SLAG IN PORTLAND CEMENT CONCRETE (BDE)	35
MOBILIZATION (BDE)	36
NON-CLASS I SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)	37
PAVEMENT REMOVAL (BDE)	38
PAYMENTS TO SUBCONTRACTORS (BDE)	38
PLACEMENT OF ARROW BOARDS (BDE)	39
PORTLAND CEMENT CONCRETE PATCHING (BDE)	40

PRECAST CONCRETE (BDE)	45
PROSECUTION AND PROGRESS.....	46
RAP FOR USE IN CLASS I AND SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)	46
SEGREGATION CONTROL OF BITUMINOUS CONCRETE (BDE)	48
SHOULDER RESURFACING (BDE)	50
SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)	52
SUPERPAVE BITUMINOUS CONCRETE MIXTURES (LOW ESAL) (BDE)	57
TEMPORARY EROSION CONTROL SEEDING (BDE).....	58
TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE).....	60
TYPE III BARRICADES.....	60
WEIGHT CONTROL DEFICIENCY DEDUCTION.....	61
DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION	63

STATE OF ILLINOIS

SPECIAL PROVISIONS

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction," adopted January 1, 1997, the latest edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways," and the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheet included herein which apply to and govern the construction of FAP Route 301 (US 20), Project ACNHF-ACHS-301(19), Section 40R-1-M-2, Winnebago County, Contract No. 64569, and in case of conflict with any part or parts of said Specifications, the said Special Provisions shall take precedence and shall govern.

LOCATION OF PROJECT

US 20 and Winnebago Road.

DESCRIPTION OF PROJECT

Intersection improvements including construction of buried left turn lanes, traffic signals, and widening and resurfacing.

TRAFFIC CONTROL PLAN

Effective January 14, 1999

Traffic Control shall be in accordance with the applicable sections of the Standard Specifications for Road and Bridge Construction, the applicable guidelines contained in the National Manual on Uniform Traffic Control Devices for Streets and Highways, Illinois Supplement to the National Manual on Uniform Traffic Control Devices, these special provisions, and any special details and Highway Standards contained herein and in the plans.

Special attention is called to Articles 107.09 and 107.14 of the Standard Specifications for Road and Bridge Construction and the following Highway Standards relating to traffic control.

701006	701101	701201	701306	BLR 21-5
701311	701326	701406	701701	702001

During resurfacing and grinding operations, flaggers and flagger signs at intersections shall be required when operations are within 30m (100 feet), if required by the Engineer.

The "WORKERS" (W21-1a(O)-48) signs shall be replaced with symbol "Right or Left Lane Closed Ahead" (W4-2R or L(O)-48) signs.

ROAD CONSTRUCTION AHEAD signs shall be located on all side roads.

These additional devices, if required by the Engineer, shall be paid for as a part of Traffic Control Standards stated within, and not as an addition to the contract.

Additional Pavement Marking and Channelizing Devices. At locations where Standard 701406 is required, and the normal posted speed is 55 or 65 mph, additional channelizing devices and typical weave shall be provided as required for an "L" distance equal to the lane width times a ratio of 55 or 65/1. Payment will not be made separately but shall be included in the payment for the traffic control standard called for.

Temporary Pavement Marking: This work shall be done in accordance with Section 703 "Work Zone Pavement Markings".

Road Closure - Sideroads: The road closures for Capriola Parkway & Landmark Drive shall be completed using Type III barricades in compliance with Standards 702001, and signing according to Standard BLR 21-5. Two flashers shall be installed above each Type III barricade on the traveled lanes. The "ROAD CLOSED" (R11-2) or "ROAD CLOSED TO THRU TRAFFIC" (R11-4) signs shall be mounted on the barricade centered over the travel lane of approaching traffic. Flashers and flags shall be installed above all warning signs involving a night time road closure. The Contractor shall only be allowed to close one road at a time and it shall not be re-opened until all work to that road is completed. The time of closure for each road shall be limited to 5 working days to minimize inconvenience to the public.

The Contractor shall be required to notify the Winnebago County Highway Department and/or corresponding Township Commissioner for any sideroad closure or opening.

All cost involved in conforming with this provision shall be considered a part of Traffic Control and Protection Standard 701201.

Traffic Signal Work: No traffic signal work shall begin until all of the traffic signal hardware is on the job site.

Traffic Control and Protection, Standard 701326: This work shall be done in accordance with Section 701 of the Standard Specifications and the Typical Applications of Traffic Control Devices for Highway Construction, Standard 701326, and as specified herein.

All sideroads shall have Road Construction Ahead signs mounted in advance of the intersection.

Where construction operations result in a temporary drop-off at the edge of pavement and is open to traffic, SHOULDER DROP-OFF signs shall be used. The contractor shall place signs at the beginning of the drop-off area, just beyond major intersections or commercial entrances, nominal spacing of 3120 m (2 miles), and as directed by the Engineer. The signs shall remain in place until the drop-off is eliminated.

Additional barricades, flagger signs, Yield or Stop signs and flaggers shall be required at the intersections. Barricade spacing shall be at 4.5 m (15-foot) centers within these intersections and Yield or Stop signs shall be used to control traffic.

Drop-offs, obstacles, hazards, and excavations shall be protected under Articles 701.04(b)(1) and 702.04.

When work is within 60 m (200 feet) of an intersection, flagger signs and flaggers shall be required on the sideroad at the discretion of the Engineer.

These additional devices, if required by the Engineer, shall be paid for as part of Traffic Control and Protection 701326 and not as an addition to the contract.

This work will be paid for at the contract unit price per Lump Sum for TRAFFIC CONTROL AND PROTECTION STANDARD 701326.

Traffic Control and Protection Standard 701406: This work shall be done in accordance with Standard 701406, Section 701 of the Standard Specifications and as specified herein.

Shoulder Barricades or Cones: Barricades or cones shall be placed on the shoulder at 122 m (400') centers and 1.2 m (four feet) from the edge of pavement of the lane open to traffic. The barricades or cones shall begin at the taper and carry through the work area.

Check Barricades or Cones: In areas where traffic is restricted to one lane, check barricades or cones shall be placed one in the middle of the closed lane and one at the shoulder perpendicular to traffic every 300 m (1000 feet) to prevent motorists from using the work area as a travel lane. Additional check barricades shall be placed in advance of any hazard in the work area which endangers a motorist.

When Left - or Right-turn lanes are within the construction area, right- or left-turn lanes shall be provided when possible by gapping barricades or drums within these areas. Two additional signs shall also be required symbol "right or left arrow ONLY" (R3-5-3036) 30 - 60 m (100 - 200 feet) in advance of the gap and "LEFT or RIGHT TURN LANE" (R3-1100-2424) at the gap.

The barricades or cones as shown in Standard 701406 shall not encroach on the lane open to traffic at any time. The only exception to this will be in the immediate work area when workers are present, then the barricades or cones may be moved out to permit the construction operation.

This work will be paid for at the contract unit price per Lump Sum for TRAFFIC CONTROL AND PROTECTION STANDARD 701406.

Maintenance of Traffic:

Winnebago Road shall be kept open to one-way traffic at all times during working hours and two-way traffic during non-working hours. The contractor shall maintain at least one lane of traffic on US 20 on the eastbound and westbound lanes during working hours and then open all lanes of traffic during non-working hours.

The Contractor shall be required to notify the Winnebago County Highway Department, the corresponding Township Commissioner, emergency response agencies (i.e.: fire, ambulance, police), school bus companies and the Department of Transportation (Bureau of Project Implementation) regarding any changes in traffic control.

The sawing of patches and patching for Winnebago Road shall be completed using Traffic Control and Protection Standard 701201.

The resurfacing and placing of shoulder aggregate for Winnebago Road shall be completed using Traffic Control and Protection Standard 701306.

The widening of Winnebago Road shall be completed using Traffic Control and Protection Standard 701326.

All operations that involve encroachment on an open lane of US 20 shall be completed using Traffic Control and Protection Standard 701406.

The contractor shall have all lanes open on weekends, unless prior approval is obtained from the Resident Engineer.

BITUMINOUS CONCRETE COURSES CLASS I, TYPE 3 MIXTURE C AND MIXTURE CL

This work shall be constructed according to Article 406 of the Standard Specifications and applicable contract special provisions except the density shall be 95% to 102% of maximum possible in-place density. The maximum density shall be determined by performing a roller growth curve utilizing a nuclear density gauge. The nuclear density gauge shall be used according to the Special Provision Quality Control and Quality Assurance of Bituminous Mixtures first paragraph of Article (c) (1) under Quality Control by Contractor.

REMOVE EXISTING CULVERTS

Effective August 24, 1995

This work shall consist of the removal and satisfactory disposal of existing culverts at locations shown in the plans. These culverts may be concrete or clay, with or without concrete headwalls, or metal pipes with concrete headwalls. Metal pipes without headwalls will not be paid for with this pay item, but shall be removed as specified in the General Notes.

If materials resulting from the removal of the concrete culverts and headwalls are to be used in the embankment, they shall conform to, and be placed and compacted in accordance with Section 205 of the Standard Specifications.

All corrugated metal pipe culverts in condition for re-use shall be cleaned and stored along the right of way. Any re-usable pipe damaged by the Contractor shall be replaced by him at his expense.

All unusable material shall be disposed of by the Contractor at his expense.

All costs incurred in conforming with this special provision shall be included in the contract unit price each for REMOVE EXISTING CULVERTS.

GEOTECHNICAL REINFORCEMENT

Effective July 1, 1994

Biaxial Geogrid Flat Installation

This work consists of furnishing and installing an integrally-formed, high-density polypropylene geotechnical grid reinforcement material. The grid shall have an aperture, rib and junction cross section sufficient to permit significant mechanical interlock with the material being reinforced. There shall be a high continuity of tensile strength through all ribs and junctions of the grid material to reinforce the embankment or subgrade as shown on the plans and specifications.

Materials: The geogrid shall conform to the property requirements listed below:

Reinforcement and Interlock

<u>Property</u>	<u>Test Method</u>	<u>Value</u>
-----------------	--------------------	--------------

Tensile Modulus:

Along Axis of Highest Strength	GRI GG1-87*	14,000 Lb/Ft (Min)
-----------------------------------	-------------	--------------------

* Secant modulus at 50 mm (2") elongation measured by Geosynthetic Research Institute test method GG1-87 "Geogrid Tensile Strength". No offset allowances are made in calculating secant modulus.

Apertures:

Open Area	COE Method Modified**	70% (Nom.)
-----------	-----------------------	------------

** Percent open area measured without magnification by Corps of Engineers method as specified in CW 02215 Civil Works Construction Guide, November, 1977.

Junctions:

Strength	GRI GG2-87***	750 Lb/Ft (Min)
Efficiency	GRI GG2-87***	90% (Min)

*** Geogrid junction strength and junction efficiency measured by Geosynthetic Research Institute test method GG2-87 "Geogrid Junction Strength".

Material

High Density Polypropylene	ASTM D 1401 Group I/Class 1/Grade 2	98% (Min)
Carbon Black	ASTM 4218	0.5% (Min)

The supplier should provide a certification that his product meets the above requirements.

The geotechnical reinforcement shall be placed as described herein or as shown on the cross sections.

Geogrid shall be delivered to the jobsite in such a manner as to facilitate handling and incorporation into the work without damage. Material shall be stored in such a manner as to prevent exposure to direct sunlight and damage by other construction activities.

Prior to the installation of the geogrid, the application surface shall be cleared of debris, sharp objects and trees. Tree stumps shall be cut to the level of the ground surface. If the stumps cannot be cut to the ground level, they shall be completely removed. In the case of subgrades, all wheel tracks or ruts in excess of 75 mm (3 inches) in depth shall be graded smooth or otherwise filled with soil to provide a reasonably smooth surface.

The geotechnical reinforcement shall be placed with the "roll length" parallel to the pavement. Fabric of insufficient width or length to fully cover the specified area shall be lapped a minimum of 600 mm (24 inches).

Installation:

The granular blanket shall be constructed to the width and depth required on the plans. Unless otherwise specified, the material shall be back-dumped on the Geogrid in a sequence of operations beginning at the outer edges of the treatment area with subsequent placement towards the middle.

Placement of material on the Geogrid shall be accomplished by spreading dumped material off of previously placed material with a bulldozer blade or endloader, in such a manner as to prevent tearing or shoving of the Geogrid. Dumping of material directly on the Geogrid will only be permitted to establish an initial working platform. No construction equipment shall be allowed on the Geogrid prior to placement of the granular blanket.

Unless otherwise specified in the plans or Special Provisions, the granular material, shall be placed to the full required thickness and compacted to the satisfaction of the Engineer.

Geogrid which is damaged during installation or subsequent placement of granular material, due to failure of the Contractor to comply with these provisions, shall be repaired or replaced at his expense, including costs of removal and replacement of the granular material.

Torn Geogrid may be patched in-place by cutting and placing a piece of the same Geogrid over the tear. The dimensions of the patch shall be at least 600 mm (2 feet) larger than the largest dimension of the tear and it shall be weighted or otherwise secured to prevent the granular material from causing lap separation.

Method of Measurement:

Geotechnical Reinforcement will be measured in square meters (square yards) for the surface area placed. The excavation, replacement and compaction of the granular layer, in excess of the thickness which is incidental to the drainage structure, shall be paid for separately. Each layer of geogrid will be paid for separately.

Basis of Payment:

This work will be measured in place and the area computed in square yards. The work will be paid for at the contract unit price per Square Meter (Square Yard) for GEOTECHNICAL REINFORCEMENT.

SEEDING, CLASS 6 (MODIFIED)

Effective January 5, 2000

This work shall be done according to Section 250 of the Standard Specifications and the following seeding mixture.

TYPE	SEEDS	KG/Hectare ((lbs./Acre)
Conservation Mixture Modified	Smooth Brome Grass	70 (60)
	Vernal Alfalfa 2	25 (20)
	Perennial Ryegrass	45 (40)
	Oats, Spring	55 (48)

This work will be paid for at the contract unit price per hectare (acre) for SEEDING, CLASS 6 (MODIFIED).

ELECTRIC CABLE IN CONDUIT, SIGNAL, NO. 20 3C

This item shall be to supply the following electric cable for use with the emergency vehicle priority system.

Cable: The cable shall meet the requirements of IPCEA-S-61-402/NEMA WC 5, Section 7.4, 600-volt control cable, 75 degree C, Type B, and the following:

- A) The cable shall contain 3 conductors, each of which shall be #20 (7x28) stranded, tinned copper with 25 mil minimum average thickness low-density polyethylene insulation. Insulation shall be color coded: 1-yellow, 1-blue, 1-orange.
- B) The shield shall be aluminized polyester film with a nominal 20% overlap. A #20 (7x28) stranded, tinned, bare drain wire shall be placed between the insulated conductors and the shield and in the contact with the conductive surface of the shield.
- C) The jacket shall be black PVC with minimum ratings of 600 volts and 80 degrees C and minimum thickness of 45 mils. The jacket shall be marked as required by IPCEA/NEMA.
- D) The finished outside diameter of the cable shall not exceed 0.35 inch.
- E) The capacitance as measured between any conductor and the other conductors and the shield shall not exceed 48 pico farads per foot at 1000 Hz.

This work shall be paid for at the contract unit price Foot for ELECTRIC CABLE IN CONDUIT, SIGNAL, NO. 20 3C, which price shall be payment in full for furnishing and installing the cable described above.

FULL-ACTUATED CONTROLLER AND TYPE IV CABINET

The controller shall conform to the specifications as stated in Section 857 of the "Standard Specifications for Road and Bridge Construction".

The contractor shall have a factory trained technician from the manufacturer and/or supplier, with expertise in the controllers being installed, present during the controller installation. He will be expected to be able to program the controller timer, trouble-shoot and correct any problems with the equipment that arises and verify that the equipment is functioning according to the plans and specifications.

The supplier of the controller assembly shall provide a Certificate of Acceptance verifying that the conflict monitor has been tested, under load, for all possible combinations and functions properly.

The controller shall be completely compatible with the Central office Eagle MARC System software currently in place in the District 2 office to permit remote monitoring and programming.

The cabinet shall have provisions for the installation of a voice grade 3002 dial up telephone service or equivalent.

The controller cabinet shall be equipped with surge suppressor / noise filters for both the telephone line and the modem's power receptacle. These shall be of the three (3) stage variety containing avalanche diodes, metal oxide varistors and gas tube arrestors. They may be two separate devices or a single unit combining both telephone line as well as power line surge suppression and noise filtering for the modem

The controller cabinet shall be equipped with an internal Hayes compatible 2400 Smartmodem or equivalent. No programming switches of any kind will be acceptable on the 2400 baud modems.

The cabinet shall have an aluminum finish.

This item shall be paid for at the contract unit price each for FULL-ACTUATED CONTROLLER AND TYPE IV CABINET, which price shall be payment in full for furnishing the equipment described above and installing it in satisfactory operating condition.

STROBE LIGHT

This work shall consist of furnishing and installing a strobe light as shown on the plans or as directed by the Engineer.

The strobe light shall operate on 120V AC, 60Hz, 0.1 amp with a 65 FPM flash rate. The strobe light shall have a clear acrylic dome.

The strobe shall be mounted by drilling a hole in the back side of the mast arm. The Contractor shall use saddle clamps, elbows and nipples to bring the strobe up above the arm.

This work will be paid for at the contract unit price each for STROBE LIGHT, which price shall be payment in full as described above.

LIGHT DETECTOR AMPLIFIER

This work shall be performed in accordance with manufacturer's specifications and with Section 852 of the "Standard Specifications for Road and Bridge Construction". The emergency preemption system shall be the "Tomar/Optronix Optical Preemption System. The light detector amplifier shall be the Tomar 2140 card and backed with a four channel capacity. The System shall have ID capability with the necessary software included so that events can be down loaded to a laptop computer.

This work will be paid for at the contract unit price each for LIGHT DETECTOR AMPLIFIER, which price shall payment in full for all labor and material necessary to complete the installation as described above.

SIGNAL HEADS, LIGHT EMITTING DIODE

This work shall consist of furnishing signal head indications (LED Red, Yellow and Green) as indicated in the various signal head configurations as shown on the plans or as directed by the Engineer. These heads shall meet the requirements of Section 840 and Article 1085.37 of the "Standard Specifications for Road and Bridge Construction".

The optical unit of all traffic signal and pedestrian indications shall be light emitting diodes (LED's) instead of incandescent bulbs. Each signal head shall conform fully with the "Interim Purchase Specification of the Institute of Transportation Engineers (ITE) for LED Vehicle Traffic Signal Modules" published July, 1998, or applicable successor ITE specification except for when its terms are in conflict with the terms contained in this special provision. In such cases, this special provision shall supercede the contrary I.T.E. specification. The circular Reds shall be Dialight DuraLED (18 LED's). The circular Greens and Yellows along with the Red, Yellow and Green arrow indications may be standard LED's.

The lens of each signal indication shall be tinted with a wavelength-matched color to reduce sun phantom effect and enhance on/off contrast. The tinting shall be uniform across the lens face. Polymeric lens shall provide a surface coating applied to provide abrasion resistance.

Each pedestrian signal LED module shall be provide the ability to actuate the outline of an upraised hand and the outline of a walking person on one 12" polycarbonate head. "Egg Crate" type sun shields are not permitted. All figures must be a minimum of nine (9) inches in height and easy to identified at distance of 120 feet.

The LED signal modules shall be AlInGaP technology for Red, Yellow, Portland Orange (pedestrian) and White (pedestrian) indications, and GaN for Green indications, and shall be the ultra bright type rated for 100,000 hours of continuous operation from -40°C (-40°F) to +74°C (+165°F). The modules shall meet all specifications throughout this range. The LED signal modules shall be protected against dust and moisture intrusion per the requirements of NEMA Standard 250-1991 for Type 4 enclosures to protect all internal components.

The LED modules shall provide constant light output under power. Modules with dimming capabilities shall have the option disabled or set on a non-dimming operation.

In the event of a power outage, light output from the LED modules shall cease instantaneously.

In addition to conforming with the requirements for circular LED signal modules, LED arrow indication modules shall meet existing specifications stated in the ITE Standard: "Vehicle Traffic Control Signal Heads", Section 9.01, Chapter 2 for arrow indications. The LEDs arrow indication shall be solid display with a minimum of three (3) outlining rows of LEDs and at least one (1) fill row of LEDs. The LED's shall be spread evenly across the illuminated portion of the arrow area.

The LED signal modules shall be replaced or repaired if an LED signal module fails to function as intended due to workmanship or material defects within the first 60 month from the date of delivery. Led signal modules which exhibit luminous intensities less than the minimum values specified in Section 4.1.4 of the "Interim Purchase Specification of the ITE for LED Vehicle Traffic Signal Modules" within the first 36 months of the date of delivery shall be replaced or repaired.

The individual LEDs shall be wired such that a catastrophic loss or the failure of one or more LEDs will not result in the loss of the entire module.

The LED modules will have EPA Energy Star compliance ratings, if applicable to that shape, size and color with an operating voltage of 120 VAC. The modules shall operate from 60HZ \pm HZ AC line over a voltage ranging from 95 volts to 135 volts with a power factor of 0.90 or greater. Total Harmonic distortion (current and voltage) induced into an AC power line by an LED signal module shall not exceed 20%. The fluctuations of line voltage shall have no visible effect on the luminous intensity of the indication. The LED circuitry shall prevent perceptible flicker to the unaided eye over the voltage range specified above. The modules shall be operationally compatible with used controller assemblies (solid state load switches, flashers and conflict monitors). When a current of 20 mA AC (or less) is applied to the unit, the voltage read across the two leads shall be 15 VAC or less. The modules and associated on-board circuitry must meet Class A emission limits referred in Federal Communications Commission (FCC) Title 47, Sub-Part B, Section 15 regulations concerning the emission of electronic noise.

All wiring and terminal blocks shall meet the requirements of Section 13.02 of the ITE Publication: Equipment and Material Standards, Chapter 2 (Vehicle Traffic Control Signal Heads). The signal module on-board circuitry include voltage surge protection to withstand high-repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS-2, 1992. The LED signal module shall be single, self-contained device, not requiring on-site assembly for installation. The power supply for the module shall be integral to the unit. The circuit board and power supply shall be contained inside the module. The assembly and manufacturing process for the LED signal assembly shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration from high winds and other sources.

The minimum initial luminous intensity values for the modules shall be as stated in Table 2 and/or Table 4 at 25° C. The modules shall meet or exceed the illumination vales as shown in Table 3 and/or Table 4, throughout the useful life based on normal use in a traffic signal operation over the operating temperature range. The measured chromaticity coordinates of the modules shall conform to the chromaticity requirements of Table 5, throughout the useful life over the operating temperature range.

Material used for the lens and signal module construction shall conform to ASTM specifications for the materials. The enclosures containing either the power supply or electronic components of the signal module shall be made of UL94VO flame retardant materials. The lens of the signal module is excluded from this requirement.

Each module shall have manufacturer's name, trademark, model number, serial number, date of manufacture (month - year) and lot number as identification permanently marked on the back of the module. The following operating characteristics shall be permanently marked on the back of the module: rated voltage and rated in Watts and Volt-Ampere. Each module shall have a symbol of the type of module (i.e. circle, arrow, etc.) in the color of the module. The symbol shall be one inch (25.4mm) in diameter. Additionally, the color shall be written out in ½ in letters next to the symbol. If a specific mounting orientation is required, each module shall have prominent and permanent marking(s) for correct indexing and orientation within a signal housing. The markings shall consist of an up arrow, or the word "UP" or "TOP".

Each module shall have maximum weight of 1.8 kg (4 lbs.). Each module shall be a sealed unit to include all parts necessary for operation (a printed circuit board, power supply, a lens and gasket, etc.) and shall be weather proof after installation and connection.

Two secured, color coded, 600 V, 20 AWG minimum, jacketed wires, conforming to the National Electric Code, rated for service at +105° C, are to be provided for electrical connection for each LED signal module shall be 3 ft (1 m) in length, with quick disconnect terminals attached.

The lens of the module shall be integral to the unit, shall be convex with a smooth outer surface and made of plastic or of glass. The lens may be tinted or may use transparent film or materials with similar characteristics to enhance ON/OFF contrasts. The use of tinting or other materials to enhance ON/OFF contrasts shall not affect chromaticity and shall be uniform across the face of the lens. The LED signal module lens shall be UV stabilized and shall be capable of withstanding ultraviolet (direct sunlight) exposure for a minimum period of 60 without exhibiting evidence of deterioration. If a polymeric lens is used, a surface coating or chemical surface treatment shall be used to provide front surface abrasion resistance.

The arrow module shall meet specifications stated in Section 9.01 of the ITE Publication: Equipment and Material Standards, Chapter 2 (Vehicle Traffic Control Signal Heads) for arrow indications. The LEDs shall be spread evenly across the illuminated portion of the arrow area.

This item shall be paid for at the contract unit price each for SIGNAL HEAD, LED of the type and of the particular kind of material specified. The type specified will indicate the number of signal faces, the number of signal sections in each signal face and the method of mounting.

Pedestrian head(s) shall be paid for at the contract unit price each for PEDESTRIAN SIGNAL HEAD, LED.

TABLES

Table 1: Maximum Power Consumption (in Watts)

	Red		Yellow		Green	
Temperature	25° C	74° C	25° C	74° C	25° C	74° C
12 inch (300mm) circular	11	17	22	25	15	15
12 inch (300mm) arrow	9	12	10	12	11	11
	Hand-Portland Orange			Person-White		
Pedestrian Indication	6.2			6.3		

Table 2: Minimum Initial Intensities for Circular Indications (in cd)

	12 inch (300mm)		
Angle (v,h)	Red	Yellow	Green
2.5, ±2.5	399	798	798
2.5, ±7.5	295	589	589
2.5, ±12.5	166	333	333
2.5, ±17.5	90	181	181
7.5, ±2.5	266	532	532
7.5, ±7.5	238	475	475
7.5, ±12.5	171	342	342
7.5, ±17.0	105	209	209
7.5, ±22.5	45	90	90
7.5, ±27.5	19	38	38
12.5, ±2.5	59	119	119
12.5, ±7.5	57	114	114
12.5, ±12.5	52	105	105
12.5, ±17.5	40	81	81
12.5, ±22.5	26	52	52
12.5, ±27.5	19	38	38
17.5, ±2.5	26	52	52
17.5, ±7.5	26	52	52
17.5, ±12.5	26	52	52
17.5, ±17.5	26	52	52
17.5, ±22.5	24	48	48
17.5, ±27.5	19	38	38

Table 3: Maintained Minimum Intensities for Circular Indications (in cd)

	12 inch (300mm)		
Angle (v,h)	Red	Yellow	Green
2.5, ± 2.5	339	678	678
2.5, ± 7.5	251	501	501
2.5, ± 12.5	141	283	283
2.5, ± 17.5	77	154	154
7.5, ± 2.5	226	452	452
7.5, ± 7.5	202	404	404
7.5, ± 12.5	145	291	291
7.5, ± 17.0	89	178	178
7.5, ± 22.5	38	77	77
7.5, ± 27.5	16	32	32
12.5, ± 2.5	50	101	101
12.5, ± 7.5	48	97	97
12.5, ± 12.5	44	89	89
12.5, ± 17.5	34	69	69
12.5, ± 22.5	22	44	44
12.5, ± 27.5	16	32	32
17.5, ± 2.5	22	44	44
17.5, ± 7.5	22	44	44
17.5, ± 12.5	22	44	44
17.5, ± 17.5	22	44	44
17.5, ± 22.5	20	41	41
17.5, ± 27.5	16	32	32

Table 4: Minimum Initial and Maintained Intensities for Arrow and Pedestrian Indications (in cd/m²)

	Red	Yellow	Green
Arrow Indication	5,500	11,000	11,000

Table 5: Chromaticity Standards (CIE Chart) Section 8.04

Red	Y: not greater than 0.308, or less than 0.998 - x
Yellow	Y: not less than 0.411, nor less than 0.995 - x
Green	Y: not less than 0.506 - 0.519x, nor less than 0.150 + 1.068x, nor more than 0.730 - x

TEMPORARY TRAFFIC SIGNAL INSTALLATION


The temporary traffic signal installation shall conform to the specifications as stated in Section 849 of the "Standard Specifications for Road and Bridge Construction".

The Contractor shall provide detection for all directions of traffic. This may be accomplished either with pavement loops or camera's. US 20 and Winnebago Road shall have presence detection. The Contractor shall be responsible for providing vehicle detection throughout all of the various stages of construction.

The sequence of operation shall be wired as a standard six phase operation. The signals shall function as a split phase for E-W (US 20) and as single phase for N-S (Winnebago Road) or as directed by the Engineer. The signal heads for the left turns on US 20 shall be three sections with a green arrow lens. All signals facing Winnebago Road shall be three sections.

Additional cable shall be coiled for each signal head to provide the Contractor the ability to adjust the head alignment with changes in the traffic control or as directed by the Engineer.

This work will be paid for at the contract unit price each for TEMPORARY TRAFFIC SIGNAL INSTALLATION.

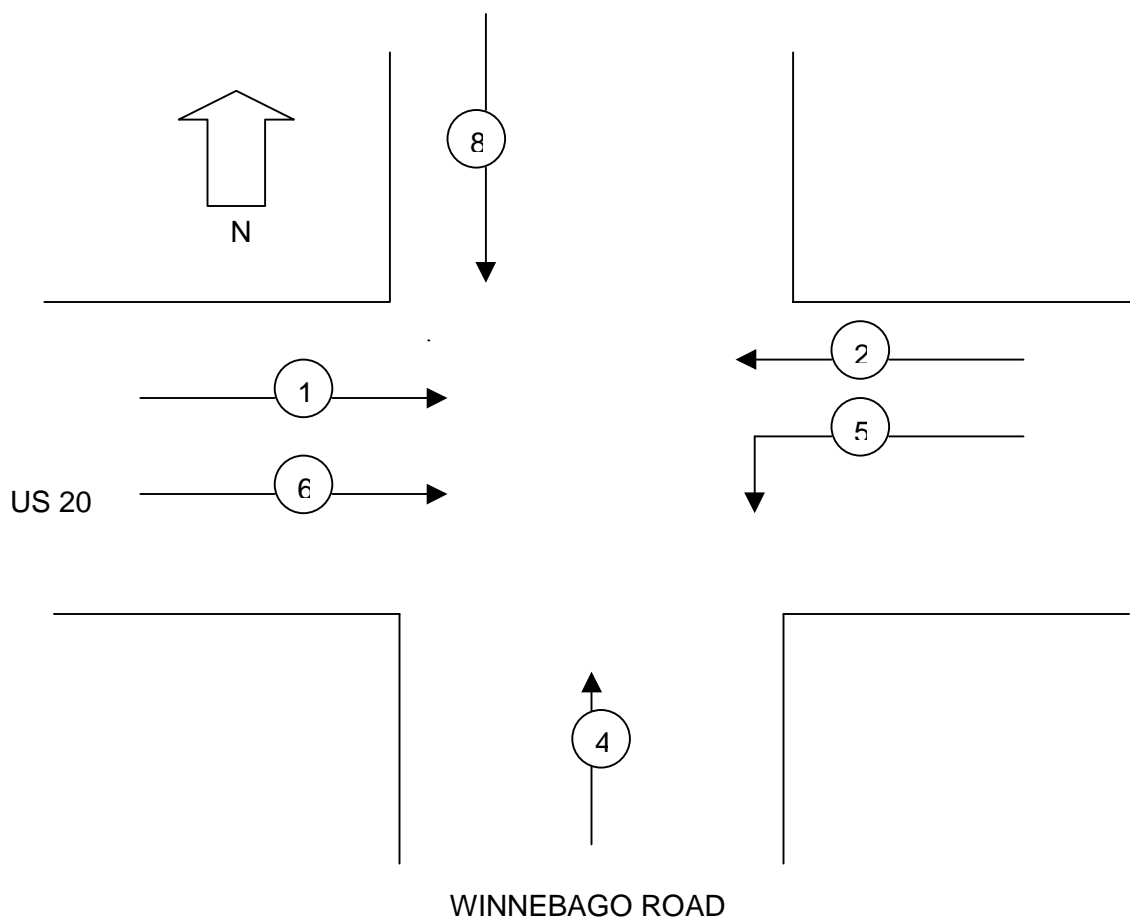

ADJUSTING FRAMES AND GRATES (BDE)

Effective: August 1, 2001
 Revised: November 1, 2001

Add the following to Article 602.02 of the Standard Specifications:

- “(k) High Density Polyethylene (HDPE) Plastic Note 2
 (l) Recycled Rubber..... Note 3

Note 2. HDPE plastic adjusting rings may be used to adjust the frames and grates of drainage and utility structures up to a maximum of 75 mm (3 in.). They shall be installed and sealed underneath the frames according to the manufacturer's specifications.

HDPE plastic adjusting rings shall be manufactured from Class B HDPE plastic, as identified in ASTM D 1248, using the injection molding process. They shall be designed and tested to meet or exceed an HS25 wheel load according to the AASHTO Standard Specifications for Highway Bridges and shall be stabilized against the effects of ultra violet light.

Recycled material may be used. If recycled material is used, only polyethylene and less than two percent polypropylene will be allowed in the reclaim process. All feed stock shall be tested by the manufacturer on a procurement/production batch basis to verify the following property values:

Physical Property	Test Standard	Value
Melt Flow Index	ASTM D 1238	0.30 to 30.0 g/10 min (0.01 to 1.06 oz/10 min)
Specific Gravity	ASTM D 792	0.84 to 0.98
Tensile Strength, Yield	ASTM D 638	13,800 kPa (2000 psi) minimum

HDPE plastic adjusting rings shall have no void areas, cracks, or tears, and have no effects due to exposure to ultraviolet light. Ripples or sags are limited to less than ten percent of the surface. The actual diameter or length shall not vary more than 3 mm (0.125 in.) from the specified diameter or length. Variations in height are limited to ± 1.6 mm (0.063 in.) for parts up to 50 mm (2 in.) or ± 3 mm (0.125 in.) for parts from 50 mm (2 in.) to 75 mm (3 in.). Variations shall not exceed 6 mm (0.25 in.) from flat (dish, bow or convoluting edge) or 3 mm (0.125 in.) for bulges or dips in the surface.

Note 3. Riser rings fabricated from recycled rubber may be used to adjust the frames and grates of drainage and utility structures up to a maximum of 50 mm (2 in.). They shall be installed and sealed underneath the frames according to the manufacturer's specifications.

Recycled rubber products shall consist of no less than 80 percent by weight recycled rubber. The riser shall meet or exceed the following when maintained at $23 \pm 2^{\circ}\text{C}$ ($73 \pm 3^{\circ}\text{F}$) for at least 24 hours prior to and during testing.

Physical Property	Test Standard	Value
Density	ASTM C 642-90	$1.10 \pm 0.034 \text{ g/cu cm}$ ($68.63 \pm 2.11 \text{ lb/cu ft}$)
Durometer Hardness	ASTM D 2240-97 Shore A	72 ± 6^1
Compression Deformation under 1000 kPa (145 psi)	ASTM D 575 –Test Method B Test of Specified Force	$9 \pm 4 \%$
Compression Set	ASTM D 395 – Illinois Modified Test Method B Compression Set under Constant Deflection in Air	$5 \pm 3 \%^2$
Weathering (70 hrs at 70°C (158°F)) Hardness retained	ASTM D 573	98 %, minimum
Freeze/thaw when exposed to deicing chemicals	ASTM C 672-91	3 % loss, maximum

¹ Average of three tests over a 28 mm (1.12 in.) diameter sample.

² Samples compressed to 75 percent of initial height.

Recycled rubber adjusting rings shall have no void areas, cracks, or tears, and have no effects due to exposure to ultraviolet light. The actual diameter or length shall not vary more than 3 mm (0.125 in.) from the specified diameter or length. Variations in height are limited to $\pm 1.6 \text{ mm}$ (0.063 in.) for parts up to 50 mm (2 in.)."

Revise Article 603.08 of the Standard Specifications to read:

“603.08 Adjusting Rings. As an option to Articles 603.03 through 603.07, the adjustment of frames and grates may be accomplished through the use of adjusting rings that fit on top of the frame. These adjusting rings shall be fabricated as a one-piece assembly from gray iron, ductile iron or structural steel. They shall provide a structural capacity equal to or greater than the existing frame and shall not affect the opening size or surface appearance. The rings shall have a device for positively positioning and fastening the ring to the existing frame to prevent movement under traffic.”

80052

AGGREGATE SHOULDERS (BDE)

Effective: November 1, 1999

Revise Article 481.01 of the Standard Specifications to read:

“481.01 Description. This work shall consist of furnishing, placing, shaping and compacting aggregate on a prepared subgrade adjacent to the edges of the completed pavement structure or stabilized shoulder.”

CONSTRUCTION REQUIREMENTS

Revise Article 481.04 of the Standard Specifications to read:

“481.04 General. The road shall be opened to traffic according to Article 701.05(a)(1). Before placing the aggregate the subgrade shall be prepared in a manner approved by the Engineer.

The shoulders shall be constructed in layers of not more than 150 mm (6 inches) thick when compacted, except that if tests indicate the desired results are being obtained, the compacted thickness of any layer may be increased to a maximum of 200 mm (8 inches). The aggregate shall be deposited directly on the prepared subgrade or on the preceding layer of compacted aggregate with a spreader.

If any subgrade material is worked into the aggregate during the compacting or finishing operation, all granular material within the affected area shall be removed and replaced with new aggregate.

The shoulders shall be constructed to the thicknesses shown on the plans. Thickness determinations shall be made at such points as the Engineer may select. When the constructed thicknesses are less than 90 percent of the thicknesses shown on the plans, aggregate shall be added to obtain the required thicknesses; however, the surface elevation of the completed shoulders shall not exceed by more than 3 mm (1/8 inch) the surface elevation shown on the plans or authorized by the Engineer.

- (a) Aggregate Shoulders, Type A. Before the aggregate is deposited on the subgrade, it shall contain sufficient moisture to provide satisfactory compaction. The water and aggregate shall be mixed at a central mixing plant. The plant shall be equipped with a mechanical mixing device, and aggregate and water measuring devices, meeting the approval of the Engineer. Wetting the aggregate in cars, bins, stockpiles or trucks will not be permitted.

Each layer of material shall be compacted with a tamping roller, or with a pneumatic-tired roller, or with a vibratory machine, or with a combination of any of the 3 until the compaction has been approved by the Engineer. If the moisture content of the material is not such as to permit satisfactory compaction during the compacting operations, water shall be added in such quantity that satisfactory compaction can be obtained. The top layer shall be given a final rolling with a three-wheel or tandem roller. Three-wheel or tandem rollers shall weigh from 5.5 to 9 metric tons (6 to 10 tons) and not less than 35 N/mm (200 lbs. per inch) nor more than 55 N/mm (325 lbs. per inch) of width of the roller.

- (b) Aggregate Shoulders, Type B. Before placing the aggregate wedge shoulder, Type B, the weeds and grass on the area to be covered shall be cut. The aggregate shall be deposited in its final position with a spreader and compacted to the satisfaction of the Engineer. If the moisture content of the aggregate is not such as to permit satisfactory compaction during the rolling operations, water shall be added in such quantity that satisfactory compaction can be obtained.”

Delete the last sentence of Article 481.06 of the Standard Specifications.

80003

AGGREGATE SURFACE COURSE FOR TEMPORARY ACCESS (BDE)

Effective: April 1, 2001

Revise Article 402.10 of the Standard Specifications to read:

“402.10 For Temporary Access. The contractor shall construct and maintain aggregate surface course for temporary access to private entrances, commercial entrances and roads according to Article 402.07 and as directed by the Engineer.

The aggregate surface course shall be constructed to the dimensions and grades specified below, except as modified by the plans or as directed by the Engineer.

- (a) Private Entrance. The minimum width shall be 3.6 m (12 ft). The minimum compacted thickness shall be 150 mm (6 in.). The maximum grade shall be eight percent, except as required to match the existing grade.
- (b) Commercial Entrance. The minimum width shall be 7.2 m (24 ft). The minimum compacted thickness shall be 230 mm (9 in.). The maximum grade shall be six percent, except as required to match the existing grade.
- (c) Road. The minimum width shall be 7.2 m (24 ft). The minimum compacted thickness shall be 230 mm (9 in.). The grade and elevation shall be the same as the removed pavement, except as required to meet the grade of any new pavement constructed.

Maintaining the temporary access shall include relocating and/or regrading the aggregate surface course for any operation that may disturb or remove the temporary access. The same type and gradation of material used to construct the temporary access shall be used to maintain it.

When use of the temporary access is discontinued, the aggregate shall be removed and utilized in the permanent construction or disposed of according to Article 202.03.”

Add the following to Article 402.12 of the Standard Specifications:

“Aggregate surface course for temporary access will be measured for payment as each for every private entrance, commercial entrance or road constructed for the purpose of temporary access. If a residential drive, commercial entrance, or road is to be constructed under multiple stages, the aggregate needed to construct the second or subsequent stages will not be measured for payment but shall be included in the cost per each of the type specified.”

Revise the second paragraph of Article 402.13 of the Standard Specifications to read:

“Aggregate surface course for temporary access will be paid for at the contract unit price per each for TEMPORARY ACCESS (PRIVATE ENTRANCE), TEMPORARY ACCESS (COMMERCIAL ENTRANCE) or TEMPORARY ACCESS (ROAD).

Partial payment of the each amount bid for temporary access, of the type specified, will be paid according to the following schedule:

- (a) Upon construction of the temporary access, sixty percent of the contract unit price per each, of the type constructed, will be paid.
- (b) Subject to the approval of the Engineer for the adequate maintenance and removal of the temporary access, the remaining forty percent of the pay item will be paid upon the permanent removal of the temporary access.”

80057

BIDDING REQUIREMENTS AND CONDITIONS (BDE)

Effective: January 1, 1998

Revised: January 1, 2001

Add the following after the second sentence in the first paragraph of Article 102.05:

"If the Department has made a sub-surface examination of the site of the work, the borings, test pits, or other information pertaining thereto are available for examination by all bidders by written request to the office of the District Engineer of the district in which the work is to be performed. It is understood and agreed that the availability of subsurface information from the Department is solely for the convenience and information of the bidder. The Department will be responsible for the accuracy of the boring information only for the point where the boring was taken. It is the Contractor's responsibility to determine whether the boring is indicative of the site or whether the Contractor should make additional investigations or borings. The Department makes no representation or warranty, express or implied, as to the information conveyed or as to any interpretations made from the data."

80030

BITUMINOUS CONCRETE SURFACE COURSE

Effective: April 1, 2001

For bituminous surface course mixture only, revise the 5th paragraph of Article 406.23 of the Standard Specifications to read:

“The metric tons (tons) paid for surface course mixture will be calculated using the following formula:

METRIC TONS(TONS) PAID= METRIC TONS (TONS) PAID is based on weight tickets required by the 4th paragraph of this Article but shall not exceed 103 percent of the Adjusted Plan Quantity. The Adjusted Plan Quantity is calculated as follows:

Adjusted Plan Quantity = C x quantity shown on plans or as specified by the Engineer.

Nomenclature: (Metric)

$$C = \frac{(d) \times 999.6 \times 0.025}{59.8} = (d)(0.4179)$$

d = G_{mb} = average bulk specific gravity (d) from approved mix design.
59.8 = Constant; unit weight of surface course shown on the plans, in kg/sq m/25 mm, used to estimate plan quantity.
999.6 = Constant; for conversion.
0.025 = Constant; for conversion.

Nomenclature: (English)

$$C = \frac{(d) \times 62.4 \times 0.75}{112.0}$$

d = G_{mb} = average bulk specific gravity (d) from approved mix design.
112.0 = Constant; unit weight of surface course shown on the plans, in lbs./sq.yd./in., used to estimate plan quantity.
62.4 = Constant; for conversion.
0.75 = Constant; for conversion.

If project circumstances warrant a new surface course mix design, the above formulae shall be used to calculate the METRIC TONS (TONS) PAID for tonnage placed using each respective mix design.”

80050

CONSTRUCTION FOR CEMENT PROCESSING ADDITIONS (BDE)

Effective: July 1, 1999

Revise Article 1001.01 of the Standard Specifications to include the following at the end of the Article:

For portland cement according to ASTM C 150, the total of all organic processing additions shall not exceed 1.0% by mass (weight) of the cement, and the total of all inorganic processing additions shall not exceed 4.0% by mass (weight) of the cement. Organic processing additions shall be limited to grinding aids that improve the flowability of cement, reduce pack set, and improve grinding efficiency. Inorganic processing additions shall be limited to granulated blast-furnace slag according to the chemical requirements of AASHTO M 302, and Class C fly ash according to the chemical requirements of AASHTO M 295.

For portland-pozzolan cement and portland blast-furnace slag cement according to ASTM C 595, the total of all organic processing additions shall not exceed 1.0% by mass (weight) of the cement. Organic processing additions shall be limited to grinding aids as previously defined. Inorganic processing additions shall not be permitted.

The bill of lading shall state if granulated blast slag or Class C fly ash has been used as a processing addition. The bill of lading shall also have a statement that indicates the inorganic processing addition is not in excess of 4.0% by mass (weight) of the cement.

45380

COARSE AGGREGATE FOR BITUMINOUS COURSES (BDE)

Effective: November 1, 2000

Revised: January 1, 2001

Replace Article 1004.03(a) of the Standard Specifications with the following:

(a) Description. The coarse aggregate for bituminous courses shall be according to the following table.

Class	Mixture	Aggregates Allowed
A	Seal or Cover	Gravel Crushed Gravel Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag Crushed Concrete
B		Gravel Crushed Gravel Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Concrete
I And Superpave	A or B and IL-25.0 or IL-19.0 Binder	Crushed Gravel Crushed Stone Crushed Sandstone Crushed Slag (ACBF)
I And Superpave	C Surface	Crushed Gravel Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag except when used as leveling binder Gravel – only when used in Class I Type 3CL or Superpave IL-9.5L

I and Superpave	D Surface	<p>Crushed Gravel Crushed Stone (other than Limestone) Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag</p> <p>Limestone may be used in Mixture D if blended by volume in the following coarse aggregate percentages: Up to 25% Limestone with at least 75% Dolomite Up to 50% Limestone with at least 50% any aggregate listed for Mixture D except Dolomite Up to 75% Limestone with at least 25% Crushed Slag (ACBF) or Crushed Sandstone</p>
I and Superpave	E Surface	<p>Crushed Gravel Crushed Stone (other than Limestone and Dolomite) Crushed Sandstone</p> <p>No Limestone.</p> <p>Dolomite may be used in Mixture E if blended by volume in the following coarse aggregate percentages: Up to 75% Dolomite with at least 25% Crushed Sandstone, Crushed Slag (ACBF), or Crushed Steel Slag. When Crushed Slag (ACBF) or Crushed Steel Slag are used in the blend, the blend shall contain a minimum of 25% to a maximum of 75% of either Slag by volume. Up to 50% Dolomite with at least 50% of any aggregate listed for Mixture E.</p> <p>If required to meet design criteria, Crushed Gravel or Crushed Stone (other than Limestone or Dolomite) may be blended by volume in the following coarse aggregate percentages: Up to 75% Crushed Gravel or Crushed Stone (other than Limestone or Dolomite) with at least 25% Crushed Sandstone, Crushed Slag (ACBF), or Crushed Steel Slag. When Crushed Slag (ACBF) or Crushed Steel Slag are used in the blend, the blend shall contain a minimum of 25% to a maximum of 50% of either Slag by volume.</p>

I and Superpave	F Surface	Crushed Sandstone No Limestone. Crushed Gravel or Crushed Stone (except Limestone) may be used in Mixture F if blended by volume in the following coarse aggregate percentages: Up to 50% Crushed Gravel or Crushed Stone with at least 50% Crushed Sandstone, Crushed Slag (ACBF), or Crushed Steel Slag. When Crushed Slag (ACBF) or Crushed Steel Slag are used in the blend, the blend shall contain a minimum of 50% to a maximum of 75% of either Slag by volume
-----------------------	--------------	---

80024

COARSE AGGREGATE FOR TRENCH BACKFILL, BACKFILL AND BEDDING (BDE)

Effective: April 1, 2001
Revised: August 1, 2001

Revise Article 208.02 of the Standard Specifications to read:

“208.02 Materials. Materials shall be according to the following Articles of Section 1000 – Materials:

- (a) Fine Aggregate (Note 1) 1003.04
- (b) Coarse Aggregate (Note 2) 1004.06

Note 1. The fine aggregate shall be moist to the satisfaction of the Engineer.

Note 2. The coarse aggregate shall be wet to the satisfaction of the Engineer.”

Revise the first sentence of the second paragraph of subparagraph (b) in Article 208.03 of the Standard Specifications to read:

"Any material meeting the requirements of Articles 1003.04 or 1004.06 which has been excavated from the trenches shall be used for backfilling the trenches."

Add the following to the end of Article 542.02 of the Standard Specifications:

- “(bb) Fine Aggregate (Note 1) 1003.04
- (cc) Coarse Aggregate (Note 2) 1004.06

Note 1. The fine aggregate shall be moist to the satisfaction of the Engineer.

Note 2. The course aggregate shall be wet to the satisfaction of the Engineer."

Revise the first and second sentences of the second paragraph of subparagraph (a) of Article 542.04 of the Standard Specifications to read:

"The unstable and unsuitable material shall be removed to a depth determined by the Engineer and for a width of one diameter (or equivalent diameter) of the pipe on each side of the pipe culvert, and replaced with aggregate. Rock shall be removed to an elevation 300 mm (1 ft) lower than the bottom of the pipe or to a depth equal to 40 mm/m (1/2 in./ft) of ultimate fill height over the top of the pipe culvert, whichever is the greater depth, and for a width as specified in (b) below, and replaced with aggregate."

Revise the second paragraph of subparagraph (c) of Article 542.04 of the Standard Specifications to read:

"Well compacted aggregate, at least 100 mm (4 in.) in depth below the pipe culvert, shall be placed the entire width of the trench and for the length of the pipe culvert, except well compacted impervious material shall be used for the outer 1 m (3 ft) at each end of the pipe. When the trench has been widened by the removal and replacement of unstable or unsuitable material, the foundation material shall be placed for a width not less than the above specified widths on each side of the pipe. The aggregate and impervious material shall be approved by the Engineer and shall be compacted to the Engineer's satisfaction by mechanical means."

Revise subparagraph (e) of Article 542.04 of the Standard Specifications to read:

"(e) Backfilling. As soon as the condition of the pipe culvert will permit, the entire width of the trench shall be backfilled with aggregate to a height of at least the elevation of the center of the pipe. The aggregate shall be placed longitudinally along the pipe culvert, except at the outer 1 m (3 ft) at each end of the culvert which shall be backfilled with impervious material. The elevation of the backfill material on each side of the pipe shall be the same. The space under the pipe shall be completely filled. The aggregate and impervious material shall be placed in 200 mm (8 in.) layers, loose measurement, and compacted to the satisfaction of the Engineer by mechanical means.

When using PVC, PE, or corrugated metal pipe, the aggregate backfill shall be continued to a height of at least 300 mm (1 ft) above the top of the pipe and compacted to the satisfaction of the Engineer by mechanical means.

When using PVC, PE, or corrugated metal pipe a minimum of 300 mm (1 ft) of cover from the top of the pipe to the top of the subgrade will be required.

The installed pipe and its embedment shall not be disturbed when using movable trench boxes and shields, sheet pile, or other trench protection.

The remainder of the trench shall be backfilled with select material, from excavation or borrow, free from large or frozen lumps, clods or rock, meeting the approval of the Engineer. The material shall be placed in layers not exceeding 200 mm (8 in.) in depth, loose measurement and compacted to 95 percent of the standard laboratory density. Compaction shall be obtained by use of mechanical tampers or with approved vibratory compactors. Before compacting, each layer shall be wetted or dried to bring the moisture content within the limits of 80 to 110 percent of optimum moisture content determined according to AASHTO T 99 (Method C). All backfill material shall be deposited in the trench or excavation in such a manner as not to damage the culvert. The filling of the trench shall be carried on simultaneously on both sides of the pipe. The Contractor may, at his/her expense, backfill the entire trench with aggregate in lieu of select material. The aggregate shall be compacted to the satisfaction of the Engineer by mechanical means.

The backfill material for all trenches and excavations made in the subgrade of the proposed improvement, and for all trenches outside of the subgrade where the inner edge of the trench is within 600 mm (2 ft) of the edge of the proposed pavement, curb, gutter, curb and gutter, stabilized shoulder, or sidewalk shall be according to Section 208. The trench backfill material shall be compacted to the satisfaction of the Engineer by mechanical means.

The Contractor may, at his/her expense, backfill the entire trench with controlled low strength material meeting the approval of the Engineer.

When the trench has been widened for the removal and replacement of unstable or unsuitable material, the backfilling with aggregate and impervious material, will be required for a width of at least the specified widths on each side of the pipe. The remaining width of each layer may be backfilled with select material. Each 200 mm (8 in.) layer for the entire trench width shall be completed before beginning the placement of the next layer."

Revise subparagraph (b) of Article 542.05 of the Standard Specifications to read:

"(b) Embankment. Embankment extending to an elevation of 300 mm (1 ft) over the top of the pipe shall be constructed according to Article 542.04(f), except the material up to the elevation of the center of the pipe and extending to a width of at least 450 mm (18 in.) on each side of the pipe, exclusive of the outer 1 m (3 ft) at each end of the pipe, shall consist of aggregate. At the outer 1 m (3 ft) at each end of the culvert, impervious material shall be used."

Add the following to of Article 550.02 of the Standard Specifications:

"(m) Fine Aggregate (Note 2)	1003.04
(n). Course Aggregate (Note 3)	1004.06

Note 2. The fine aggregate shall be moist to the satisfaction of the Engineer.

Note 3. The course aggregate shall be wet to the satisfaction of the Engineer."

Revise the first two sentences of the third paragraph of Article 550.04 of the Standard Specifications to read:

"Well compacted, aggregate bedding material at least 100 mm (4 in.) in depth below the pipe, shall be placed for the entire width of the trench and length of the pipe. The aggregate shall be compacted to the satisfaction of the Engineer by mechanical means."

Revise Article 550.07 of the Standard Specifications to read:

"550.07 Backfilling. As soon as the condition of the pipe will permit, the entire width of the trench shall be backfilled with aggregate to a height of at least the elevation of the center of the pipe. The aggregate shall be placed longitudinally along the pipe. The elevation of the backfill material on each side of the pipe shall be the same. The space under the pipe shall be completely filled. The aggregate backfill material shall be placed in 200 mm (8 in.) layers, loose measurement and compacted to the satisfaction of the Engineer by mechanical means. When using PVC pipe, the aggregate shall be continued to a height of at least 300 mm (12 in.) above the top of the pipe.

The installed pipe and its embedment shall not be disturbed when using movable trench boxes and shields, sheet pile, or other trench protection.

The remainder of the trench and excavation shall be backfilled to the natural line or finished surface as rapidly as the condition of the sewer will permit. The backfill material shall consist of suitable excavated material from the trench or of trench backfill as herein specified. All backfill material shall be deposited in the trench or excavation in such a manner as not to damage the sewer. The filling of the trench shall be carried on simultaneously on both sides of the pipe. The backfill material for trenches and excavation made in the subgrade of the proposed improvement, and for all trenches outside of the subgrade where the inner edge of the trench is within 600 mm (2 ft) of the edge of the proposed pavement, curb, gutter, curb and gutter, stabilized shoulder or sidewalk shall be according to Section 208. The backfill material shall be compacted to the satisfaction of the Engineer by mechanical means

All backfill material up to a height of 300 mm (1 ft) above the pipe shall be deposited in uniform layers not exceeding 200 mm (8 in.) thick, loose measurement. The material in each layer shall be compacted to the satisfaction of the Engineer by mechanical means. The backfilling above this height shall be done according to Method 1, 2 or 3 as described below, with the following exceptions.

When trench backfill or excavated material meeting the requirements of Section 208 is required above the first 300 mm (1 ft) of the pipe, the layers shall not exceed 200 mm (8 in.). Gradations CA6 or CA10 shall not be used with Method 2 or Method 3.

Method 1. The material shall be deposited in uniform layers not exceeding 300 mm (1 ft) thick, loose measurement, and each layer shall be compacted to the satisfaction of the Engineer by mechanical means.

Method 2. The material shall be deposited in uniform layers not exceeding 300 mm (1 ft) thick, loose measurement, and each layer shall be either inundated or deposited in water.

Method 3. The trench shall be backfilled with loose material, and settlement secured by introducing water through holes jetted into the backfill to a point approximately 600 mm (2 ft) above the top of the pipe. The holes shall be spaced as directed by the Engineer but shall be no farther than 2 m (6 ft) apart.

The water shall be injected at a pressure just sufficient to sink the holes at a moderate rate of speed. The pressure shall be such that the water will not cut cavities in the backfill material nor overflow the surface. If water does overflow the surface, it shall be drained into the jetted holes by means of shallow trenches.

Water shall be injected as long as it will be absorbed by the backfill material and until samples taken from test holes in the trench show a satisfactory moisture content. The Contractor shall bore the test holes not more than 15 m (50 ft) apart and at such other locations in the trench designated by the Engineer. As soon as the watersoaking has been completed, all holes shall be filled with soil and compacted by ramming with a tool approved by the Engineer.

Backfill material which has been watersoaked shall be allowed to settle and dry for at least 10 days before any surface course or pavement is constructed on it. The length of time may be altered, if deemed desirable, by the Engineer. Where the inner edge of the trench is within 600 mm (2 ft) of the edge of the proposed pavement, curb, gutter, curb and gutter, stabilized shoulder or sidewalk, the provisions of this paragraph shall also apply.

At the end of the settling and drying period, the crusted top of the backfill material shall be scarified and, if necessary, sufficient backfill material added, as specified in Method 1, to complete the backfilling operations.

The method used for backfilling and compacting the backfill material shall be the choice of the Contractor. If the method used does not produce results satisfactory to the Engineer, the Contractor will be required to alter or change the method being used so the resultant backfill will be satisfactory to the Engineer. Should the Contractor be required to alter or change the method being used, no additional compensation will be allowed for altering or changing the method.

The Contractor may, at his/her expense, backfill the entire trench with controlled low strength material meeting the approval of the Engineer.

When sheeting and bracing have been used, sufficient bracing shall be left across the trench as the backfilling progresses to hold the sides firmly in place without caving or settlement. This bracing shall be removed as soon as practicable. Any depressions which may develop within the area involved in the construction operation due to settlement of the backfilling material shall be filled in a manner approved by the Engineer.

When the Contractor constructs the trench with sloped or benched sides according to Article 550.04, backfilling for the full width of the excavation shall be as specified, except no additional compensation will be allowed for trench backfill material required outside the vertical limits of the specified trench width.

Whenever excavation is made for installing sewer pipe across earth shoulders or private property, the topsoil disturbed by excavation operations shall be replaced as nearly as possible in its original position, and the whole area involved in the construction operations shall be left in a neat and presentable condition.

Deflection Testing for Storm Sewers. All PVC storm sewers will be tested for deflection not less than 30 days after the pipe is installed and the backfill compacted.

For PVC storm sewers with diameters 600 mm (24 in.) or smaller, a mandrel drag shall be used for deflection testing. For PVC storm sewers with diameters over 600 mm (24 in.), deflection measurements other than by a mandrel drag shall be used.

Where the mandrel is used, the mandrel shall be furnished by the Contractor and pulled by hand through the pipeline with a suitable rope or cable connected to each end. Winching or other means of forcing the deflection gauge through the pipeline will not be allowed.

The mandrel shall be of a shape similar to that of a true circle enabling the gauge to pass through a satisfactory pipeline with little or no resistance. The mandrel shall be of a design to prevent it from tipping from side to side and to prevent debris build-up from occurring between the channels of the adjacent fins or legs during operation. Each end of the core of the mandrel shall have fasteners to which the pulling cables can be attached. The mandrel shall have 9, various sized fins or legs of appropriate dimension for various diameter pipes. Each fin or leg shall have a permanent marking that states its designated pipe size and percent of deflection allowable.

The outside diameter of the mandrel shall be 95% of the base inside diameter, where the base inside diameter is:

For all PVC pipe (as defined using ASTM D 3034 methodology):

If the pipe is found to have a deflection greater than specified, that pipe section shall be removed, replaced, and retested."

Revise subparagraph (c) of Article 1003.04 of the Standard Specifications to read:

"(c) Gradation. The fine aggregate gradation shall be as follows:

Backfill, bedding and trench backfill for pipe culverts and storm sewers	FA 1, FA 2, FA 6
Porous granular embankment and backfill, french drains, and sand backfill for underdrains	FA 1, or FA 2 (Note 1)

Note 1: For FA 1 and FA 2, the percent passing the 75 μ m (No. 200) sieve shall be 2 \pm 2."

Revise the title of Article 1004.06 of the Standard Specifications to read:

"Coarse Aggregate for Blotter, Embankment, Backfill, Trench Backfill, French Drains, and Bedding."

Add the following to the end of subparagraph (c) of Article 1004.06 of the Standard Specifications:

"Backfill, bedding, and trench backfill for pipe culverts
and storm sewers CA 6, CA 10, and CA 18"

80051

CONCRETE MIX DESIGN CRITERIA (BDE)

Effective: August 1, 2001

Revise Table 1(Metric) of Article 1020.04 of the Standard Specifications as follows:

The "Min. Cement Factor kg/cu m" for Class SH concrete shall be 335(1)/360(2).

The "Max. Water/Cement Ratio kg/kg" for Class MS, SI, RR, SC, and SH concrete shall be 0.48 and for Class PV concrete shall be 0.42.

Revise Table 1(English) of Article 1020.04 of the Standard Specifications as follows:

The "Min. Cement Factor cwt/cu yd" for Class SH concrete shall be 5.65(1)/6.05(2).

The "Max. Water/Cement Ratio lb/lb" for Class MS, SI, RR, SC, and SH concrete shall be 0.48 and for Class PV concrete shall be 0.42.

Revise the last sentence of paragraph five of Article 1020.05(b) to read:

"A cement factor below 320 kg/cu m (5.35 hundredweight/cu yd) will not be permitted."

Revise the first sentence of paragraph four of Article 1021.03(c) to read:

"For Class MS, SI, RR, SC, and SH concrete, the water/cement ratio shall not exceed 0.44.

80053

EROSION AND SEDIMENT CONTROL DEFICIENCY DEDUCTION (BDE)

Effective: August 1, 2001

Revised: November 1, 2001

When the Engineer is notified or determines an erosion and/or sediment control deficiency(s) exists, he/she will direct the Contractor in writing to correct the deficiency. The Contractor shall then correct the deficiency within 24 hours. The deficiency may be any lack of repair,

maintenance, or implementation of erosion and/or sediment control devices included in the contract, or any failure to comply with the conditions of the National Pollutant Discharge Elimination System (NPDES) Storm Water Permit for Construction Site Activities.

If the Contractor fails to correct the deficiency(s) within 24 hours, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The time period will begin with the initial written notification to the Contractor and end with the Engineer's acceptance of the corrected work. The per calendar day deduction will be either \$1000.00 or 0.05 percent of the awarded contract value, whichever is greater.

If the Contractor fails to respond, the Engineer may correct the deficiencies and deduct the cost from monies due or which may become due the Contractor. This corrective action shall in no way relieve the Contractor of his/her contractual requirements or responsibilities.

80055

FINE AGGREGATE FOR PORTLAND CEMENT CONCRETE AND MORTAR (BDE)

Effective: November 1, 2000

Revised: April 1, 2001

Revise Article 1003.02 to read as follows:

"1003.02 Fine aggregate for Portland Cement Concrete and Mortar. The aggregate shall meet the requirements of Article 1003.01 and the following specific requirements:

- (a) Description. The fine aggregate shall consist of washed sand, washed stone sand, or a blend of washed sand and washed stone sand approved by the Engineer. Stone sand produced through an air separation system approved by the Engineer may be used in place of washed stone sand.
- (b) Quality. The fine aggregate materials in the gradations specified for portland cement concrete shall meet Class A Quality, except that the minus 75µm (No. 200) sieve AASHTO T11 requirement in the Fine Aggregate Quality Table shall not apply to washed stone sand or any blend of washed stone sand and washed sand approved by the Engineer. The fine aggregate for masonry mortar shall meet Class A Quality or, in the case of natural sand, shall meet the deleterious quantity limits for Class A Quality.
- (c) Gradation. The washed sand for portland cement concrete shall be Gradation FA 1 or FA 2. Washed stone sand for portland cement concrete, which includes any blend with washed sand, shall be Gradation FA 1, FA 2, or FA 20. Fine aggregate for masonry mortar shall be Gradation FA 9.
- (d) Use of Fine Aggregates. The blending, alternate use, and /or substitution of fine aggregates from different sources for use in portland cement concrete will not be permitted without the approval of the Engineer. Any blending shall be by interlocked mechanical feeders at the aggregate source or concrete plant. The blending shall be uniform, and the equipment shall be approved by the Engineer."

80026

FLY ASH IN PORTLAND CEMENT CONCRETE (BDE)

Effective: January 1, 2001

Revised: April 1, 2001

Revise Article 1020.05(c) to read as follows:

- (c) Fly Ash. At the Contractor's option, fly ash from approved sources may partially replace portland cement in concrete mixtures, for Class BD, PV, MS, SI, SC, and SH, except when blended cements are used. A mix design consisting of cement, fly ash, and ground granulated blast-furnace slag may be used only when specified by the Department. For Class PP concrete, fly ash may be used according to Article 1020.04.

Fly ash and all other materials proposed for portland cement concrete mix designs shall be furnished to the Engineer at least 60 days prior to the initiation of work. The Engineer may elect to waive the required mix designs if the proposed materials combination has been previously approved and has demonstrated satisfactory field performance.

If Class F fly ash is used, the amount of cement replaced shall not exceed 15 percent by mass (weight), and the replacement ratio (fly ash:cement replaced) shall be a minimum of 1.5:1.

If Class C fly ash is used, the amount of cement replaced shall not exceed 20 percent by mass (weight), at a minimum replacement ratio of 1.25:1. For Class C fly ash, the minimum replacement ratio may be reduced to 1:1, if the fly ash calcium oxide is 18% or greater, the fly ash loss on ignition is less than 2.0%, and a water-reducing or high range water-reducing admixture is used.

For Class PP concrete, the cement replacement with fly ash shall be according to Article 1020.04.

For bridge decks, parapets, pier and abutment caps, backwalls, wingwalls and upper 750 mm (2.5 ft.) of solid piers, the amount of cement replaced shall not exceed 15 percent by mass (weight) at a minimum replacement ratio of 1.5:1, regardless of the type of fly ash used.

Measurements of fly ash and cement shall be rounded up to the nearest 2.4 kg (5 lbs.).

Mix design strength requirements for fly ash compensated mixes shall be according to Article 1020.04.

Requirements for opening the pavement and/or structures to traffic and removal of falsework shall be according to Articles 701.05 and 503.05, except a minimum of 28 days from time of placement shall elapse in the absence of strength tests.

Except for Class PP concrete, fly ash shall not be used in concrete mixtures when the air temperature is below 40° C (40° F), without permission of the Engineer. If permission is given, the mix design strength requirement may require the Contractor to reduce the quantity of fly ash, increase the cement, or eliminate the cement factor reduction for a water-reducing or high range water-reducing admixture which is permitted according to Article 1020.05(b).

Fly ash with an R factor greater than 3.0 shall not be used in concrete which will be subjected to high sulfate concentrations in soil or water. High sulfate soils shall be those with concentrations of water soluble sulfate (as SO₄) greater than 0.10 percent, and high sulfate waters shall be those with sulfate concentrations (as SO₄) greater than 150 mg/L.

GRADATION FOR FINE AND COARSE AGGREGATES

Effective: April 1, 2001

Add the following note to the tables titled "Fine Aggregate Gradations" in Article 1003.01 (c) of the Standard Specifications:

"5/ Any aggregate produced under the Department's current Policy Memorandum, 'Aggregate Gradation Control System (AGCS)', shall meet the gradation requirements set under the AGCS program.

Add the following note to the tables titled "Coarse Aggregate Gradation 1/" in Article 1004.01 (c) of the Standard Specifications:

"9/ Any aggregate produced under the Department's current Policy Memorandum, 'Aggregate Gradation Control System (AGCS)', shall meet the gradation requirements set under the AGCS program.

80047

GROUND GRANULATED BLAST-FURNACE SLAG IN PORTLAND CEMENT CONCRETE (BDE)

Effective: April 1, 1995
Revised: January 1, 2001

Description. Ground granulated blast-furnace slag (GGBF slag) shall consist of the glassy granular material formed when molten blast-furnace slag is rapidly chilled, and then finely ground.

Material. The GGBF slag shall meet the standard physical and chemical requirements of AASHTO M 302, for Grade 100 or Grade 120 material. The Department's Policy Memorandum "Acceptance Procedure for Finely Divided Minerals Used in Portland Cement Concrete and Other Applications" will be used to approve GGBF slag.

Different sources or grades of GGBF slag shall not be mixed or used alternately in the same item of construction unless approved by the Engineer.

In addition to the provisions of Article 106.04, an approved sampling location and the necessary personnel to assist the Department representative in obtaining samples shall be provided.

General. At the Contractor's option, GGBF slag may partially replace portland cement in concrete mixtures, for Class BD, PV, MS, SI, SC and SH, except when blended cements are used. A mix design consisting of cement, GGBF slag, and fly ash may be used only when specified by the Department. For Class PP concrete, GGBF slag may be used according to Article 1020.04.

GGBF slag and all other materials proposed for portland cement concrete mix designs shall be furnished to the Engineer at least 60 days prior to the initiation of work. The Engineer may elect to waive the required mix designs if the proposed materials combination has been previously approved and has demonstrated satisfactory field performance.

The amount of cement replaced by GGBF slag shall not exceed 25 percent by mass (weight). The replacement ratio (GGBF slag:cement replaced) shall be a minimum of 1 to 1 for Grade 100 and 120. Measurements of GGBF slag and cement shall be rounded up to the nearest 2.5 kg (5 lbs.).

Mix design strength requirements for GGBF slag compensated mixes shall be according to Article 1020.04.

Requirements for opening the pavement and/or structures to traffic and removal of falsework shall be according to Articles 701.05 and 503.04, except a minimum of 28 days from time of placement shall elapse in the absence of strength tests.

Except for Class PP concrete, GGBF slag shall not be used in concrete mixtures when the air temperature is below 4° C (40° F), without permission of the Engineer. If permission is given, the mix design strength requirement may require the Contractor to reduce the quantity of GGBF slag, increase the cement, or eliminate the cement factor reduction for a water-reducing or high range water-reducing admixture which is permitted according to Article 1020.05(b).

80034

MOBILIZATION (BDE)

Effective: January 1, 1999

Revised: November 1, 2000

This work shall consist of preparatory work and operations necessary for the movement of personnel, equipment, supplies and incidentals to the project site for the establishment of offices, buildings and other facilities necessary for work on the projects and for all other work or operations which must be performed or costs incurred when beginning work on the project.

The amount which a Contractor will receive payment for, in accordance with the following schedule will be limited to six percent of the total contract bid. Should the bid for the item exceed six percent, the amount over six percent will not be paid until ninety percent of the adjusted contract value is earned.

Basis of Payment. Partial payment of the lump sum amount bid for Mobilization, not exceeding six percent, will be paid according to with the following schedule:

- (a) Upon execution of the contract, seventy-five percent of the pay item will be paid.
- (b) When ten percent of the original contract amount is earned, an additional fifteen percent of the pay item will be paid.
- (c) When ninety percent of the contract value is earned, the remaining ten percent of the pay item will be paid along with any amount bid in excess of the six percent limit.

Nothing herein shall be construed to limit or preclude partial payment for other items as provided for by the contract.

53312

NON-CLASS I SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2001

Revised: March 1, 2001

Description. This work shall consist of constructing a Bituminous Aggregate Mixture according to Articles 312.01 – 312.11 of the Standard Specifications, a Bituminous Base Course according to Section 355 of the Standard Specifications or Bituminous Concrete Base Course Widening according to Section 356 of the Standard Specifications and the Recurring Special Provision, "Quality Control/Quality Assurance of Bituminous Concrete Mixtures" except as modified herein.

Materials.

	BAM	BBC/BBCW
Coarse Aggregate	Article 312.03 (a)	Article 355.02 (a)
Fine Aggregate	Article 312.03, Note 1	Article 355.02 (b)
Mineral Filler	----	Article 355.02 (c)
RAP Material	Article 312.03 (b)	Article 355.02 (d)
Bituminous Materials	Unless otherwise specified on the plans, PG 58-22. If the Contractor uses more than 15% RAP, a softer PG binder may be required, as determined by the Engineer.	

Mixture Criteria.

(a) Add the following to the Mixture Requirements:

	BAM	BBC
#200:AC% ratio	1.4	1.4

Design Volumetric Requirements:

	Design Compactive Effort	Design Air Voids (%)
BAM	N _{DES} = 30	2.0%
BCC	N _{DES} = 50	2.0%

Basis of Payment. This work will be paid for at the contract unit price per square meter (square yard) for STABILIZED SUBBASE, BITUMINOUS BASE COURSE SUPERPAVE, or BITUMINOUS CONCRETE BASE COURSE WIDENING SUPERPAVE of the thickness specified.

PAVEMENT REMOVAL (BDE)

Effective: January 1, 1999
Revised: November 1, 2001

Revise the second paragraph of Article 440.02 of the Standard Specifications to read:

“The thickness of the existing pavement structure to be removed, including overlays and other appurtenances, will be shown on the plans.”

Add the following to Article 440.07 of the Standard Specifications:

- “(c) Adjustment of Quantities. Pavement removal will be adjusted if the thickness varies more than 15 percent from that shown on the plans. The quantity will be either increased or decreased according to the following chart.

<u>% change of thickness</u>	<u>% change of quantity</u>
0 to less than 15	0
15 to less than 20	10
20 to less than 30	15
30 and greater	20

When an adjustment is made for variations in pavement thickness a resulting adjustment will also be made in the earthwork quantities when applicable.

No adjustment will be made for variations in the amount of reinforcement.”

21982

PAYMENTS TO SUBCONTRACTORS (BDE)

Effective: June 1, 2000

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require contractors to pay subcontractors for satisfactory performance of their subcontracts within a specific number of days after receipt of each payment made to the contractor, and to require the prompt return of retainage withheld from subcontractors.

State law addresses the timing of payments to be made to subcontractors. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, generally requires that when a contractor receives any payment from the Department, the contractor is required to make corresponding, proportional payments to each subcontractor performing work within 15 calendar days after receipt of the state payment. Section 7 of the State Prompt Payment Act further provides that interest in the amount of 2% per month, in addition to the payment due, shall be paid to any subcontractor by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

As partial payments are made to the Contractor in accordance with Article 109.07 of the Standard Specifications for Road and Bridge Construction, the Contractor shall make a corresponding partial payment within 15 calendar days to each subcontractor in proportion to the work satisfactorily completed by each subcontractor. The proportionate amount of partial payment due to each subcontractor shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the partial payment to the Contractor. Subcontractors shall be paid in full, including the return of any retainage previously withheld, within 15 calendar days after the subcontractor's work has been satisfactorily completed.

This Special Provision does not create any rights in favor of any subcontractor against the State of Illinois or authorize any cause of action against the State of Illinois on account of any payment, nonpayment, delayed payment or interest claimed by application of the State Prompt Payment Act. The Department will neither determine the reasonableness of any cause for delay of payment nor enforce any claim to payment, including interest. Moreover, the Department will not approve any delay or postponement of the 15 day requirement. State law creates remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond in accordance with the Public Construction Bond Act, 30 ILCS 550.

PLACEMENT OF ARROW BOARDS (BDE)

Effective: August 1, 2001

Add the following to Article 701.04 of the Standard Specifications:

- “(g) Arrow Boards. Arrow boards shown on standards or in the plans at the beginning of tapers, shall be placed at the beginning of the taper or in the closed lane within the first 90 m (300 ft) of the taper.”

80056

PORTLAND CEMENT CONCRETE PATCHING (BDE)

Effective: January 1, 2001

Revise Article 442.02, Note 1 to read as follows:

Note 1. When patching ramp pavements and 2-lane pavements with 2-way traffic, Class PP-2, PP-3, or PP-4 concrete shall be used for Class A, Class B and Class C patching. For all other pavements, Class PP-1, PP-2, PP-3, or PP-4 concrete shall be used, at the Contractor's option, for Class A, Class B and Class C patching.

Revise the first paragraph of Article 442.06(e) to read as follows:

- (e) Concrete Placement. For Class A, Class B and Class C Patches, concrete shall be placed according to Article 420.07 and governed by the limitations set forth in Article 1020.14, except that the maximum temperature of the mixed concrete immediately before placing shall be 35° C (96° F.), the required use of an approved retarding admixture when the plastic concrete reaches 30° C (85° F.) shall not apply.

Revise the first paragraph of Article 442.06(h) to read as follows:

- (h) Curing and Protection. In addition to Article 1020.13, when the air temperature is less than 13° C (55° F.), the Contractor shall cover the patch with minimum R12 insulation until opening strength is reached. Insulation is optional when the air temperature is 13° C - 35° C (55° F. - 96° F.). Insulation shall not be placed when the air temperature is greater than 35° C (96° F.).

Revise the second paragraph of Article 701.05(e)(1)d.1. to read as follows:

No open holes, broken pavement, or partially filled holes shall remain overnight for bituminous patching or when the Department specifies only Class PP-2, PP-3, or PP-4 concrete be used. The only exception is conditions beyond the control of the Contractor.

Revise Article 701.05(e)(2)b. to read as follows:

- b. Strength Tests. For patches constructed with Class PP-1 concrete, the pavement may be opened to traffic when test specimens cured with the patches have obtained a minimum flexural strength of 4150 kPa (600 psi) or a minimum compressive strength of 22,100 kPa (3200 psi), according to Article 1020.09.

For patches constructed with Class PP-2, PP-3, or PP-4 concrete, the pavement may be opened to traffic when test specimens cured with the patches achieve a minimum flexural strength of 2050 kPa (300 psi) or a minimum compressive strength of 11,000 kPa (1600 psi), according to Article 1020.09.

With the approval of the Engineer, concrete strength may be determined according to AASHTO T 276. The strength-maturity relationship shall be developed from concrete which has an air content near the upper specification limit. The strength-maturity relationship shall be re-established if the mix design or materials are changed.

Revise Article 701.05(e)(2)b. to read as follows:

- (c) Construction Operations. For Class PP-2, PP-3, or PP-4 concrete used on ramp pavements and 2-lane pavements with 2-way traffic, or when the Department specifies only Class PP-2, PP-3, or PP-4 concrete be used for other pavements, Contractor construction operations shall be performed in a manner which allows the patches to be opened the same day and before nightfall. If patches are not opened before nightfall, the additional traffic control shall be at the Contractor's expense. Any time patches cannot be opened before nightfall, the Contractor shall change subsequent construction operations or the mix design. The changes shall be at no additional cost to the Department.

Delete Article 701.05(e)(2)c.

Revise Article 1020.04 by replacing Class PP concrete with the following:

TABLE 1. CLASSES OF PORTLAND CEMENT CONCRETE AND MIX DESIGN CRITERIA				
Class of Concrete	Use	Specification Section Reference	Cement Factor cwt/c.y.	Max. Water/Cement Ratio lbs/lbs
PP-1	PCC Patching Pavement or Bridge Deck	442	Type I Cement 6.50 to 7.50 Type III Cement 6.20 to 7.20	0.44
PP-2	PCC Patching Pavement or Bridge Deck	442	Type I Cement 7.35	0.38
PP-3	PCC Patching Pavement or Bridge Deck	442	Type III Cement 7.35	0.35
PP-4	PCC Patching Pavement or Bridge Deck	442	Rapid Hardening Cement 6.00 to 6.25	0.50

For PP-1, the Contractor has the option to replace the Type I Cement with Class C fly ash or ground granulated blast-furnace slag. The amount of cement replaced shall not exceed 15 percent by mass (weight), at a minimum replacement ratio of 1.5:1.

For PP-2, the Contractor has the option to replace the Type I cement with Class C fly ash or ground granulated blast-furnace slag. The amount of cement replaced shall not exceed 30 percent by mass (weight), at a minimum replacement ratio of 1:1.

For PP-3, in addition to the cement, 45kg (100 lbs.) of ground granulated blast-furnace slag and 23 kg (50 lbs.) of microsilica are required. For an air temperature greater than 30° C (85° F), the Contractor has the option to replace the Type III cement with Type I cement.

For PP-4, the cement shall be from the Department's "Approved List of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs."

TABLE 1. (CONT'D) CLASSES OF PORTLAND CEMENT CONCRETE AND MIX DESIGN CRITERIA							
Class of Concrete	Slump, inches	Mix Design Compressive Strength, psi		Mix Design Flexural Strength, psi		Air Content, %	Coarse Aggregate Gradations Permitted
		Hours		Hours			
		12	48	12	48		
PP – 1	4 Max	-----	3200	-----	600	4.0 – 7.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 2	6 Max	1600	3200	300	600	4.0 – 6.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 3	4 Max	1600	3200	300	600	4.0 – 6.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 4	6 Max	1600	3200	300	600	3.0 – 6.0	CA-7, CA-11, CA-13, CA14, or CA-16

For PP-1, PP-2, PP-3, or PP-4; only CA-13, CA-14, or CA-16 may be used for bridge deck patching. In addition, the mix design strength at 48 hours shall be increased to 27,500 kPa (4,000 psi) compressive or 4,650 kPa (675 psi) flexural for bridge deck patching.

For PP-1, the slump may be increased to 6 Max if a high range water-reducing admixture is used.

Revise the first paragraph of Article 1020.05(b) to read as follows:

- (b) Admixtures. Except as specified, the use of admixtures to increase the workability or to accelerate the hardening of the concrete will be permitted only when approved in writing by the Engineer. The Department will maintain an Approved List of Concrete Admixtures. If the Department specifies a calcium chloride accelerator, it shall be a standard solution of calcium chloride and water. The standard solution shall contain a maximum of 0.5 kg (4.0 lbs.) of regular (77% minimum) or a maximum 0.4 kg (3.2 lbs.) of concentrated (94% minimum) calcium chloride per 3.8 liters (1 gallon) of solution.

Replace the fourth paragraph of Article 1020.05(b) with the following seven paragraphs:

At the Contractor's option, admixtures other than air entraining agents may be used for Class PP-1 concrete. The accelerator shall be the non-chloride type. If a water-reducing or retarding admixture is used, the cement factor may be reduced a maximum 18 kg/m³ (0.30 hundredweight per cu. yd.). If a high range water-reducing admixture is used, the cement factor may be reduced a maximum 36 kg/m³ (0.60 hundredweight per cu. yd.). An accelerator shall always be added prior to a high range water-reducing admixture, if both are used.

If Class C fly ash or ground granulated blast-furnace slag is used in Class PP-1 concrete, a water-reducing or high range water-reducing admixture shall be used. However, the cement factor shall not be reduced if a water-reducing, retarding, or high range water-reducing admixture is used. In addition, an accelerator shall not be used.

For Class PP-2 or PP-3 concrete; a non-chloride accelerator followed by a high range water-reducing admixture shall be used, in addition to the air entraining admixture. For Class PP-3 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-2 or PP-3 concrete, the Contractor has the option to use a water-reducing admixture. A retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

When the air temperature is less than 13° C (55° F.) for Class PP-1 or PP-2 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-4 concrete, a high range water-reducing admixture shall be used, in addition to the air entraining admixture. The Contractor has the option to use a water-reducing admixture. An accelerator shall not be used. For stationary or truck mixed concrete, a retarding admixture shall be used to allow for haul time. The Contractor has the option to use a mobile portland cement concrete plant according to Article 1103.04, but a retarding admixture shall not be used unless approved by the Engineer.

If the Department specifies a calcium chloride accelerator for Class PP-1 concrete, the maximum chloride dosage shall be 1.0 liter (1.0 quart) of standard solution per 45 kg (100 lbs.) of cement. The dosage may be increased to a maximum 2.0 liters (2.0 quarts) per 45 kg (100 lbs.) of cement if approved by the Engineer. If the Department specifies a calcium chloride accelerator for Class PP-2 concrete, the maximum chloride dosage shall be 1.3 liters (1.3 quarts) of standard solution per 45 kg (100 lbs.) of cement. The dosage may be increased to a maximum 2.6 liters (2.6 quarts) per 45 kg (100 lbs.) of cement if approved by the Engineer.

Revise the last paragraph of Article 1020.05(b) to read as follows:

If a high range water-reducing admixture is used, the maximum slump given in Article 1020.04 may be increased according to Article 1021.03(c) for all classes of concrete, except Class PV, PP, and SC concrete.

Delete Articles 1020.05(g), (1) and (2).

80036

PRECAST CONCRETE (BDE)

Effective: July 1, 1999
Revised: August 1, 2000

Description. This Special Provision identifies non-prestressed, precast concrete products which shall be produced according to the Department's current "Quality Control/Quality Assurance Program for Precast Concrete Products".

Products. The products shall be according to the Standard Specifications for each precast concrete item listed:

Product Class	Precast Item	Article
Box Culverts	Precast Concrete Box Culverts	540.06
Reinforced Concrete Pipe	Reinforced Concrete Culvert, Storm Drain, And Sewer Pipe	1040.03
	Concrete Sewer, Storm Drain, And Culvert Pipe	1040.04
	Reinforced Concrete Elliptical Culvert, Storm Drain, And Sewer Pipe	1040.05
	Concrete Drain Tile	1040.06
	Reinforced Concrete Arch Culvert, Storm Drain, And Sewer Pipe	1040.07
	Precast Reinforced Concrete Manhole Sections	1043.01
Concrete Blocks	Concrete Masonry Units	1042.01
	Retaining Wall Blocks	Inserted Special Provision
Miscellaneous and Associated Products	Perforated Concrete Pipe	Inserted Special Provision
	Reinforced Concrete Pipe Elbows, Inlets, Flared End Sections, etc.	Inserted IDOT Design Standards
	Miscellaneous Concrete Products: markers, bumper blocks	Inserted Special Provision
Sound Walls	Sound Walls (non-prestressed)	Inserted Special Provision

For precast concrete products which are constructed according to AASHTO M 86, M 170, M 178, M 199, M 206, M 207, M 259, or M 273 in the Standard Specifications; cement shall be according to Article 1001.01, except the pozzolan constituent in the Type IP or Type I(PM) cement shall be fly ash.

Acceptance. Products which have been Lot or piece inspected and approved by the Department prior to July 1, 1999, will be accepted for use on this contract. Products produced on or after July 1, 1999, will be accepted only if produced according to the Department's current "Quality Control/Quality Assurance Program for Precast Concrete Products".

PROSECUTION AND PROGRESS

Effective: April 1, 2000

Add the following paragraph to Article 108.01 of the Standard Specifications:

“All subcontractors shall be registered with the Department as a condition for approval to perform work on the contract.”

80017

RAP FOR USE IN CLASS I AND SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2000

Revised: January 1, 2001

Description. This special provision establishes and describes the responsibilities of the Contractor in producing and utilizing Recycled Asphalt Pavement (RAP) for use in Class I and Superpave mixtures. Sections 406.10(c) and 1004.07 of the *Standard Specifications for Road and Bridge Construction* shall not apply.

Definition. RAP material is reclaimed asphalt pavement material resulting from the cold milling or crushing of an existing hot-mix bituminous concrete pavement structure. RAP shall originate only from Class I or Superpave mixtures on routes which were built under State of Illinois Contract. The Contractor shall supply documentation that the RAP meets these requirements.

Stockpiles.

- (a) Homogeneous. Homogeneous RAP stockpiles shall represent the same aggregate quality, the same type of aggregate (crushed natural aggregate, ACBF slag, or steel slag), similar gradation and similar AC content. Homogeneous stockpiles may not require processing (crushing and screening) if all contaminants are removed and if the consistency of the stockpile complies with the testing requirements defined herein. RAP containing steel slag shall be homogeneous and approved for use in Class I or Superpave surface mixtures only.
- (b) Conglomerate. Conglomerate RAP stockpiles may represent more than one aggregate quality and/or aggregate type. This RAP may have an inconsistent gradation and/or asphalt cement content. All Conglomerate RAP shall be processed prior to testing.
- (c) Other. Other RAP stockpiles include any or all of the following: RAP containing contaminants; RAP which does not meet the coarse aggregate requirement of C Quality or better; RAP which originates from other than state routes; Homogeneous or Conglomerate RAP which falls out of the acceptable specification limits defined herein. “Other” RAP will not be allowed for use in Class I or Superpave Bituminous Concrete Mixtures.

Quality. RAP for use in Class I or Superpave surface mixtures shall originate from milled or crushed surface mixtures only, in which the coarse aggregate is of Class B Quality or better. RAP for use in Class I or Superpave binder mixtures shall originate from milled or crushed surface mixture, binder mixture or a combination of both mixtures uniformly blended to the satisfaction of the Engineer, in which the coarse aggregate is of Class C quality or better.

Contaminants. RAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, pavement fabric, etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet Asphalt will be stockpiled separately.

Testing. All RAP shall be sampled and tested either during or after stockpiling.

For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 500 tons for the first 2,000 tons and one sample per 2,000 tons thereafter. A minimum of 5 tests shall be required for stockpiles less than 4,000 tons.

For testing existing stockpiles, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to extract representative samples throughout the pile for testing.

Before extraction, each field sample shall be split to test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample, according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

All of the extraction results shall be compiled and averaged for asphalt content and gradation. Individual extraction test results, when compared to the averages, shall be accepted if within the tolerances listed below.

Parameter	Tolerance
1/2"	± 8
#4	± 6
#8	± 5
#30	± 5
#200	± 2.0
AC	± 0.4

If more than 20% of the individual gradation or asphalt content test results fall outside the tolerances, the RAP will not be allowed to be used in Class I or Superpave mixtures unless the RAP representing the failing tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)".

Designs. At the Contractor's option, Class I or Superpave bituminous concrete binder, leveling binder, or surface course may be constructed utilizing RAP material meeting the above detailed requirements. The amount of RAP included in the mixture shall not exceed the percentages specified in the plans.

RAP designs shall be submitted for volumetric verification. If additional RAP stockpiles are within the control tolerances of a RAP stockpile that has been previously tested and used in a design, those RAP stockpiles may be used in that design at the percent previously verified.

Production. All RAP used shall meet the nominal maximum size requirement for the bituminous mixture being produced. A scalping screen shall be used in the RAP feed system to remove oversized material. If material passing the screen deck adversely affects the mix production or quality of the mix, the screen shall be set at a size specified by the Engineer.

If the RAP control tolerances or QC/QA test results require corrective action, the Contractor shall cease production of the mixture containing RAP and either switch to the virgin aggregate design or submit a new RAP design.

80011

SEGREGATION CONTROL OF BITUMINOUS CONCRETE (BDE)

Effective: July 15, 1997

Description. This work shall consist of the visual identification and corrective action of segregated bituminous concrete in conjunction with QC/QA of Bituminous Concrete Mixtures.

Definitions.

- (a) Segregation. Areas of non-uniform distribution of coarse and fine aggregate particles in a bituminous pavement.
- (b) End-of-Load Segregation. A systematic form of segregation typically identified by chevron-shaped segregated areas at either side of a lane corresponding with the beginning and end of truck loads.
- (c) Longitudinal Segregation. A linear pattern of segregation that usually corresponds to a specific area of the paver.
- (d) Severity of Segregation.
 - 1. Low. A pattern of segregation where the mastic is in place between the aggregate particles; however, there is slightly more coarse aggregate in comparison with the surrounding acceptable mat.
 - 2. Medium. A pattern of segregation that has significantly more coarse aggregate in comparison with the surrounding acceptable mat and which exhibits some lack of mastic.
 - 3. High. A pattern of segregation that has significantly more coarse aggregate in comparison with the surrounding acceptable mat and which contains little mastic.

Quality Control by the Contractor. The Contractor and the Engineer will evaluate the in place mat daily for segregation. In the Annual Quality Control Plan or Addendum, the Contractor shall identify the individual(s) responsible for implementing this Special Provision and documenting the daily evaluations and conclusions.

The Contractor shall conduct the paving operation in a manner to prevent medium or high segregation.

The Contractor shall continually monitor the plant operations, hauling or the mix, paver operations, and the compacted mat for segregation.

If medium or high segregation has been previously identified on projects with similar paving operations and mix designs, the Contractor shall include the corrective actions specified below in the Quality Control Plans or the Quality Control Addendum.

Corrective Action by the Contractor. When medium or high segregation of the mixture is identified by the Contractor, the Engineer, or the daily evaluation, the following specific actions shall be taken:

(a) End of Load Segregation. If medium or high end-of-load segregation is identified, the following actions, as a minimum, shall be taken:

1. Trucks transporting the mixture shall be loaded in multiple dumps: The first against the front wall of the truck bed and then one against the tailgate in a manner which prevents the coarse aggregate from migrating to those locations.
2. The paver shall be operated so the hopper is never below 30 percent capacity between truck exchanges.
3. The "Head of Material" in the auger area shall be controlled to keep a constant level, ± 25 mm (1 inch) tolerance.

(b) Longitudinal Segregation. If medium or high longitudinal segregation is identified, the Contractor shall make the necessary adjustment to the slats, augers, or screeds to eliminate the segregation.

The Contractor shall implement the corrective actions as soon as possible and report them to the Engineer before the next day's paving proceeds.

Quality Control Plans and addendums for subsequent projects shall reflect the corrective actions taken under the Contract, whether the corrective action was initiated by the Contractor or the Engineer.

Investigations. If the corrective actions initiated by the Contractor are insufficient in controlling medium or high segregation, the Contractor and Engineer will investigate to determine the cause of segregation.

When an investigation indicates additional corrective action is warranted, the Contractor shall implement operational changes necessary to correct the segregation problems.

Any verification testing necessary for the investigation will be performed by the Department according to the applicable project test procedures and specification limits.

Dispute Resolution. The Engineer will represent the Department in the administration of this special provision.

In cases of disputes, the District Construction Engineer will represent the Department in any disagreement regarding the application of this specification on any Contract.

Basis of Payment. This work will not be paid for separately but will be considered as included in the cost of the various items of bituminous concrete, and no additional compensation will be allowed.

42795

SHOULDER RESURFACING (BDE)

Effective: February 1, 2000

Revise Article 406.20 of the Standard Specifications to read:

“Pavement Resurfacing. Once a lift of bituminous is placed on a lane of pavement, the adjoining shoulder shall be resurfaced with an equal thickness before any other lane is resurfaced, for each lift of bituminous resurfacing.”

Revise the first sentence to the eighth paragraph of Article 406.23 of the Standard Specifications to read:

“When the option of Class I, Type 1 and 2 mixture on shoulders is used and are placed simultaneously with the traffic lane as specified in Section 482, the quantity of bituminous mixture placed on the traffic lane will be limited to a calculated tonnage based upon actual mat width and length, plan thickness or a revised thickness authorized by the Engineer, and design mix weight per millimeter (inch) of thickness.”

Delete the ninth paragraph of Article 406.23 of the Standard Specifications.

Replace the first sentence of the second paragraph Article 482.02 of the Standard Specifications with the following:

“For lifts with a thickness of 44 mm (1 ¾ inch) or greater, the aggregate used shall meet the gradation requirements for a CA 10. For lifts with a thickness less than 44 mm (1 ¾ inch) the aggregate used shall meet the gradation requirements for a CA 12.”

Revise the first paragraph of Article 482.04 of the Standard Specifications to read:

“For pavement and shoulder resurfacing projects, Class I Binder and Surface Course mixtures or Superpave mixtures designed at 50 gyrations or greater may be used in lieu of Bituminous Aggregate Mixture for the resurfacing of shoulders, at the option of the Contractor.”

Replace the third sentence of the first paragraph of Article 482.05 of the Standard Specifications with the following:

“Superpave and Class I mixtures used as the top lift and other lifts less than 44 mm (1 $\frac{3}{4}$ inch) shall meet the gradation requirements for Superpave and B Binder of Surface Course mixture according to Article 406.13.”

Revise the second paragraph of Article 482.06 of the Standard Specifications to read:

“On pavement and shoulder resurfacing projects, once a lift of bituminous resurfacing is placed on a lane of pavement, the adjoining shoulder shall be resurfaced, with an equal thickness before any other lane is resurfaced. When the Class I mixture option is used, the shoulders may be placed, at the Contractor's option, simultaneously with the adjacent traffic lane for both the binder and surface courses, provided the specified density, thickness and cross slope of both the pavement and shoulder can be satisfactorily obtained.”

80013

SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2000

Revised: January 1, 2001

Description. This Special Provision establishes and describes the responsibilities of the Contractor in designing, producing, and constructing Superpave bituminous concrete mixtures using Illinois-Modified Strategic Highway Research Program (SHRP) Superpave criteria. This work shall be according to the requirements of Section 406 of the *Standard Specifications for Road and Bridge Construction* and the Recurring "Special Provision for the Quality Control/Quality Assurance of Bituminous Concrete Mixtures", except as follows.

Materials.

- (a) Fine Aggregate Blend Requirement. The Contractor may be required to provide FA20 manufactured sand to meet the design requirements. For mixtures with $N_{design} \geq 90$, at least 50% of the required fine aggregate fraction shall consist of either stone sand, slag sand, or steel slag sand meeting the FA20 gradation.

- (b) Reclaimed Asphalt Pavement (RAP). If the Contractor is allowed to use more than 15% RAP, as specified in the plans, a softer PG binder may be required, as determined by the Engineer.

RAP shall meet the requirements of the Special Provision, "RAP for Use in Class I and Superpave Mixtures".

RAP will not be permitted in mixtures containing polymer modifiers.

RAP containing steel slag shall be permitted for use in top-lift surface mixtures only.

- (c) Asphalt Cement. The asphalt cement shall be Performance-Graded (PG) or Modified Performance-Graded meeting the requirements of Supplemental Article 1009.05 for the grade specified on the plans.

The following additional guidelines shall be used if a polymer modified asphalt is specified:

- (1) The polymer-modified asphalt cement shall be shipped, maintained, and stored at the mix plant according to the manufacturer's requirements. Polymer asphalt cement shall be placed in an empty tank and not blended with other asphalt cements.
- (2) The mixture shall be designed using a mixing temperature of 325 ± 5 °F (163 ± 3 °C) and a Gyratory compaction temperature of 305 ± 5 °F (152 ± 3 °C).
- (3) The mixture shall not be stored more than 1 hour without approval of the Engineer. The Engineer will assess the draindown of the mix in making this determination.
- (4) Pneumatic-tired rollers will not be allowed unless otherwise specified by the Engineer. A vibratory roller meeting the requirements of Article 406.16 shall be required in the absence of the pneumatic-tired roller.

- (5) A manufacturer's representative from the polymer asphalt cement producer shall be present during each polymer mixture start-up and shall be available at all times during production and lay-down of the mix.

Laboratory Equipment.

- (a) Superpave Gyratory Compactor. The Superpave Gyratory Compactor (SGC) shall be used for all QC/QA testing. Operation and testing requirements will be explained in the Department's "Superpave Field Control Course".
- (b) Ignition Oven. The ignition oven shall be substituted for the AC nuclear gauge during laboratory procedures. Operation and testing requirements will be explained in the Department's "Superpave Field Control Course".

The Engineer may waive the ignition oven requirement if the aggregates to be used are known to have ignition asphalt content calibration factors which exceed 1.5 percent.

Mixture Design. The Contractor shall submit mix designs, for approval, for each required mixture. Mix designs shall be developed by Level III personnel who have successfully completed the course, "Superpave Mix Design Upgrade". Articles 406.10 and 406.13 shall not apply. The mixtures will be designed according to the respective Illinois-Modified AASHTO references listed below.

AASHTO MP 2 - Standard Specification for Superpave Volumetric Mix Design

AASHTO PP 2 - Standard Practice for Short and Long Term Aging of Hot Mix Asphalt (HMA)

AASHTO PP 19 - Standard Practice for Volumetric Analysis of Compacted Hot Mix Asphalt (HMA)

AASHTO PP28 - Standard Practice for Designing Superpave HMA

AASHTO TP 4 - Method for Preparing and Determining the Density of Hot Mix Asphalt (HMA) Specimens by Means of the SHRP Gyratory Compactor

AASHTO TP 53 - Method for Determining the Asphalt Content of Hot Mix Asphalt (HMA) by the Ignition Method

- (a) Mixture Composition. The ingredients of the bituminous mixture shall be combined in such proportions as to produce a mixture conforming to the composition limits by weight. The gradation mixture specified on the plans shall produce a mixture falling within the limits specified in Table 1.

TABLE 1. MIXTURE COMPOSITION (% PASSING) ^{1/}												
Sieve Size	IL-25.0 mm		IL-19.0 mm				IL-12.5 mm ^{4/}		IL-9.5 mm ^{4/}			
	min	max	min	max			min	max	min	max		
37.5mm (1-1/2")		100										
25mm (1")	90	100		100								
19mm (3/4")		90	82	100				100				
12.5mm (1/2")	45	75	50	85			90	100		100		
9.5mm (3/8")								90	90	100		
4.75mm (#4)	24	42 ^{2/}	24	50 ^{2/}			24	65	24	65		
2.36mm (#8)	16	31	16	36			16	48 ^{3/}	16	48 ^{3/}		
1.18mm (#16)	10	22	10	25			10	32	10	32		
600µm (#30)												
300µm (#50)	4	12	4	12			4	15	4	15		
150µm (#100)	3	9	3	9			3	10	3	10		
75µm (#200)	3	6	3	6			4	6	4	6		

1/ Based on percent of total aggregate weight.

2/ The mixture composition shall not exceed 40% passing the 4.75mm (#4) sieve for binder courses with N_{design} ≥ 90.

3/ The mixture composition shall not exceed 40% passing the 2.36mm (#8) sieve for surface courses with N_{design} ≥ 90.

4/ The mixture composition for surface courses shall be according to IL-12.5mm or IL-9.5mm, unless otherwise specified by the Engineer.

One of the above gradations shall be used for leveling binder, as specified in the plans, and according to Article 406.04.

It is recommended that the selected combined aggregate gradation not pass through the restricted zones specified in Illinois-Modified AASHTO MP 2.

(b) Dust/AC Ratio for Superpave. The ratio of material passing the 75-µm (#200) sieve to total asphalt cement shall not exceed 1.0 for mixture design (based on total weight of mixture).

- (c) Volumetric Requirements. The target value for the air voids of the hot mix asphalt (HMA) shall be 4.0 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix and shall conform to the requirements listed in Table 2.

TABLE 2. VOLUMETRIC REQUIREMENTS					
Ndesign	Voids in the Mineral Aggregate (VMA), % minimum				Voids Filled with Asphalt (VFA), %
	IL-25.0	IL-19.0	IL-12.5	IL-9.5	
50	12.0	13.0	14.0	15	65 - 78
70					65 - 75
90					
105					

- (d) Determination of Need for Anti-Stripping Additive. The mixture designer shall determine if an additive is needed in the mix to prevent stripping. The determination will be made on the basis of tests made according to Illinois-Modified T 283 using 4" Marshall bricks. To be considered acceptable by the Department as a mixture not susceptible to stripping, the ratio of conditioned to unconditioned split tensile strengths (TSRs) shall be equal to or greater than 0.75. Mixtures, with or without an additive, with TSRs less than 0.75 will be considered unacceptable.

If it is determined that an additive is required, the additive shall be hydrated lime, slaked quicklime, or a liquid additive, at the Contractor's option. The liquid additive shall be selected from the Department's list of approved additives and may be limited to those which have exhibited satisfactory performance in similar mixes.

Dry hydrated lime shall be added at a rate of 1.0 to 1.5 percent by weight of total dry aggregate. Slurry shall be added in such quantity as to provide the required amount of hydrated lime solids by weight of total dry aggregate. The exact rate of application for all anti-stripping additives will be determined by the Department. The method of application shall be as specified in Article 406.12.

Personnel. The QC Manager and Level I Technician shall have successfully completed the Department's "Superpave Field Control Course".

Required Plant Tests. Testing shall be conducted to control the production of the bituminous mixture. The Contractor shall use the test methods identified to perform the following mixture tests at a frequency not less than that indicated in Table 3.

TABLE 3. REQUIRED PLANT TESTS			
Parameter	Frequency of Tests		Test Method
Asphalt Content by Ignition Oven	1 per half day of production		Illinois-Modified AASHTO T308
Air Voids Bulk Specific Gravity of Gyratory Sample Maximum Specific Gravity of Mixture	1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)		Per the Department's "Superpave Field Control Course" Illinois-Modified AASHTO T 209

During production, the ratio of minus 75- μ m (-#200) sieve material to total asphalt cement shall be not less than 0.6 nor more than 1.2, and the moisture content of the mixture at discharge from the mixer shall not exceed 0.5 percent. If at any time the ratio of minus 75- μ m (-#200) material to asphalt or moisture content of the mixture falls outside the stated limits, production of mix shall cease. The cause shall be determined and corrective action satisfactory to the Engineer shall be initiated prior to resumption of production.

During production, mixture containing an anti-stripping additive will be tested by the Department for stripping to according to Illinois-Modified T 283. If the mixture fails to meet the TSR criteria for acceptance, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria.

Control Charts/Limits. Control charts/limits shall be according to QC/QA requirements, except density shall be plotted on the control charts within the following control limits:

TABLE 4. DENSITY CONTROL LIMITS	
Parameter	Individual Test
Ndesign \geq 90	92.0 - 96.0%
Ndesign < 90	93 - 97%

Method of Measurement. On full-depth pavement projects, this work will be measured in place, and the quantity for payment will be computed in square meters (square yards) of the thickness specified. The width of measurement shall be the top width of the bituminous concrete course as shown on the plans.

On resurfacing projects, this work will be measured for payment in metric tons (tons) according to 406.23 of the Standard Specifications.

Basis of Payment. On full-depth pavement projects, this work will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE PAVEMENT, (FULL-DEPTH), SUPERPAVE, as specified in the plans.

On resurfacing projects in which polymer modifiers are not required, this work will be paid for at the contract unit price per metric tons (tons) for BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On resurfacing projects in which polymer modifiers are required, this work will be paid for at the contract unit price per metric tons (tons) for POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, POLYMERIZED LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, POLYMERIZED LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

80010

SUPERPAVE BITUMINOUS CONCRETE MIXTURES (LOW ESAL) (BDE)

Effective: January 1, 2001

Revised: March 1, 2001

Description. This work shall consist of constructing Bituminous Concrete Surface Course Superpave IL 9.5L and/or Bituminous Concrete Binder Course Superpave IL 19.0L according to Section 406 of the Standard Specifications and the Recurring Special Provision "Quality Control/Quality Assurance of Bituminous Concrete Mixtures", except as modified herein.

Materials. Materials shall be according to Article 406.02 except:

(a) Coarse Aggregate. Revise Article 1004.03 to read:

"Coarse aggregate for binder shall meet the requirements of a Class I Type 3 and the gradation specified below for the 19.0L mixture. Coarse aggregate for surface shall meet the requirements of a Class I Type 3C except that gravel and Class C Quality or better aggregate may be used."

(b) Bituminous Materials. Revise Article 406.02, Note 2 to read:

"Unless otherwise specified on the plans, PG 58-22. If the Contractor is allowed to use more than 15% RAP, a softer PG binder may be required, as determined by the Engineer."

RAP Designs. Revise Article 406.10 (c) to read:

"The amount of RAP included in the mixture shall not exceed 30%."

Mixture Criteria. Revise Article 406.13 (a) to read:

"The job mix formula selected shall fall within the following limits:"

	9.5L	19.0L
Sieve	Percent Passing	Percent Passing
25.0 mm (1")		100
19.0 mm (3/4")		95-100
12.5 mm (1/2")	100	
9.5 mm (3/8")	95 – 100	
4.75 mm (#4)	52 – 80	38-65
2.36 mm (#8)	38 – 65	
600 µm (#30)	< 50% of the percentage passing the #4	< 50% of the percentage passing the #4
75 µm (#200)	4.0 – 8.0	3.0-7.0
AC%	4.0 – 8.0	4.0 - 8.0
#200:AC ratio	1.0 max. design 0.6- 1.2 production	1.0 max. design 0.6- 1.2 production

Design Volumetric Properties. Revise Article 406.13 (d) to read:

Mix	Design Compactive Effort	Design Air Voids Target (%)	VMA (Voids in the Mineral Aggregate) (min.)	VFA (Voids Filled with Asphalt)
9.5L	N _{DES} =30	3.0%	15.0%	70-80%
19.0L	N _{DES} =30	4.0%	N/A	N/A

QC/QA. Design and production shall be according to the Non-Class I requirements specified in the Recurring Special Provision "Quality Control/Assurance of Bituminous Concrete Mixtures" except for the materials and requirements noted herein.

Basis of Payment. This work will be paid for at the contract unit price per metric ton (ton) for BITUMINOUS CONCRETE SURFACE COURSE SUPERPAVE IL 9.5L (Low ESAL), or BITUMINOUS CONCRETE BINDER SUPERPAVE IL 19.0L (Low ESAL).

80039

TEMPORARY EROSION CONTROL SEEDING (BDE)

Effective: August 1, 2000

Description: This work shall consist of seeding all erodible/ bare earth areas every 7 days to minimize the amount of erodible surface area within the contract limits.

Materials: Seeds shall meet the requirements of Article 1081.04 of the Standard Specifications and shall consist of Oats from March 1 to July 31 and Winter Wheat from August 1 to November 15. Seed shall be delivered to the job site in unopened, labeled bags. A certification from the

supplier stating the weight and contents of the bag shall be printed on or attached to each bag along with a certification stating that the seed meets the requirements of Article 1081.04(c) of the Standard Specifications.

Construction Requirements: Seed bed preparation will not be required for Temporary Erosion Control Seeding if the soil is in a loose condition. Light disking shall be done if the soil is hard or caked, as directed by the Engineer. The Contractor shall coordinate his work so no more than a total of 10 acres is disturbed at a time. All earthwork shall be completed, and temporary or permanently seeding complete before additional areas are disturbed. Under no conditions shall the Contractor prolong final grading and shaping so the entire project can be permanently seeded at one time. Wherever possible, final grading should be permanently seeded and the permanent erosion control should be installed. The ditch bottoms and backslopes shall not be disturbed again unless the seeding has not become established. When foreslopes need to be regraded to the new shoulder, all work shall be confined to the foreslope and any damage to the ditch bottom, backslope, or permanent erosion control shall be repaired at the Contractor's expense. Fertilizer nutrients will not be required (unless directed by the Engineer).

Hand broadcasting of the seed or other seeding methods approved by the Engineer, that will achieve a broad and reasonably uniform application, will be allowed. Seed bags shall be opened in the presence of the Engineer and the seed shall be evenly broadcast onto bare earth areas at a rate of 110 kg/hectare (100 lbs./acre). If an area that was seeded is germinating or has growth it need not be seeded again until it is disturbed.

The Contractor shall apply seed to all erodible bare earth areas within the contract limits every 7 days, regardless of weather conditions or progress of the work unless otherwise directed by the Engineer. The Engineer may require critical locations be given special treatment and seeded immediately. The Contractor shall have 48 hours to comply with the request.

The Contractor shall name a person at the preconstruction meeting who shall be on the jobsite and who is responsible for assuring that the erosion control work is completed in a timely manner.

Liquidated Damages: The equipment and materials to complete this work shall be available at the jobsite at all times. If the Contractor does not take action upon the scheduled day for seeding, (7th day), liquidated damages begin the next day. The Contractor shall be liable and shall pay to the Department the amount of \$500 for each calendar day the seeding required by the contract is not completed, not as a penalty but as liquidated damages.

When special circumstances requiring immediate seeding of critical locations occurs, liquidated damages shall begin 48 hours after notice has been given to the Contractor, at the above-described rate.

Method of Measurement: Temporary Erosion Control Seeding will be measured for payment in kilograms (pounds) of seed applied. Open, broken, or partial bags of seed will not be acceptable for use and will not be measured for payment.

Basis of Payment: This work will be paid for at the contract unit price per kilogram (pound) for TEMPORARY EROSION CONTROL SEEDING. When light disking of hard or caked soil is directed by the Engineer, the additional work will be paid for according to Article 109.04.

TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)

Effective April 1, 1992

To ensure a prompt response to incidents involving the integrity of the work zone traffic control devices, the Contractor shall provide a telephone number where a responsible individual can be contacted on a 24-hour-a-day basis. When the Engineer is notified or determines a deficiency exists, (s)he shall be the sole judges to whether the deficiency is an immediate safety hazard. The Contractor shall dispatch sufficient resources within 2 hours of notification to make needed corrections of deficiencies that constitute an immediate safety hazard. Other deficiencies shall be corrected within 12 hours. If the Contractor fails to restore the required traffic control and protection within the time limits specified above, the Engineer will impose a daily monetary deduction for each 24-hour period (or portion thereof) the deficiency exists. This time period will begin with the time of notification to the Contractor and end with the Resident Engineer's acceptance of the corrections. For this project, the daily deduction will be ____* per day. In addition, if the Contractor fails to respond, the Engineer may correct the deficiencies and the cost thereof will be deducted from monies due or which may become due the Contractor. This corrective action will in no way relieve the Contractor of his/her contractual requirements or responsibilities.

*The cost of the daily deduction will be calculated by dividing three percent of the awarded contract price by the number of calendar days anticipated for this project. The number of days anticipated for this project is 315. This procedure is to be followed regardless of whether the contract is based upon working days, contains a completion date, or has an incentive/disincentive clause.

5729I

TYPE III BARRICADES

Effective: November 1, 2000

Revise the third paragraph of subparagraph (b) of Article 702.03 to read:

“Barricade and wing barricade rails shall be no heavier than 25 mm (1 inch) thick lumber or plywood. The width of the rails shall be 200 to 300 mm (8 to 12 inches). Light weight weather resistant materials such as plastic, fiberglass, or sheet aluminum may be used. The face of the barricade rails may be sloping or vertical. Nominal lumber dimensions shall not be used to satisfy barricade component dimensions.”

80027

WEIGHT CONTROL DEFICIENCY DEDUCTION

Effective: April 1, 2001

Revised: April 10, 2001

The Contractor shall provide accurate weights of materials delivered to the contract for incorporation into the work (whether temporary or permanent) and for which the basis of payment is by weight. These weights shall be documented on delivery tickets which shall identify the source of the material, type of material, the date and time the material was loaded, the contract number, the net weight, the tare weight when applicable and the identification of the transporting vehicle. For aggregates, the Contractor shall have the driver of the vehicle furnish or establish an acceptable alternative to provide the contract number and a copy of the material order to the source for each load. The source is defined as that facility that produces the final material product that is to be incorporated into the contract pay items.

The Department will conduct random, independent vehicle weight checks for material sources according to the procedures outlined in the Documentation Section Policy Statement of the Department's Construction Manual and hereby incorporated by reference. The results of the independent weight checks shall be applicable to all contracts containing this Special Provision. Should the vehicle weight check for a source result in the net weight of material on the vehicle exceeding the net weight of material shown on the delivery ticket by 0.5% (0.7% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. No adjustment in pay quantity will be made. Should the vehicle weight check for a source result in the net weight of material shown on the delivery ticket exceeding the net weight of material on the vehicle by 0.5% (0.7% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. The Engineer will adjust the net weight shown on the delivery ticket to the checked delivered net weight as determined by the independent vehicle weight check.

The Engineer will also adjust the method of measurement for all contracts for subsequent deliveries of all materials from the source based on the independent weight check. The net weight of all materials delivered to all contracts containing this Special Provision from this source, for which the basis of payment is by weight, will be adjusted by applying a correction factor "A" as determined by the following formula:

$$A = 1.0 - \left(\frac{B - C}{B} \right); \text{ Where } A \leq 1.0; \left(\frac{B - C}{B} \right) > 0.5\% \text{ (0.7\% for aggregates)}$$

Where A = Adjustment factor

B = Net weight shown on delivery ticket

C = Net weight determined from independent weight check

The adjustment factor will be applied as follows:

$$\text{Adjusted Net Weight} = A \times \text{Delivery Ticket Net Weight}$$

The adjustment factor will be imposed until the cause of the deficient weight is identified and corrected by the Contractor to the satisfaction of the Engineer. If the cause of the deficient weight is not identified and corrected within seven (7) calendar days, the source shall cease delivery of all materials to all contracts containing this Special Provision for which the basis of payment is by weight.

Should the Contractor elect to challenge the results of the independent weight check, the Engineer will continue to document the weight of material for which the adjustment factor would be applied. However, provided the Contractor furnishes the Engineer with written documentation that the source scale has been calibrated within seven (7) calendar days after the date of the independent weight check, adjustments in the weight of material paid for will not be applied unless the scale calibration demonstrates that the source scale was not within the specified Department of Agriculture tolerance.

At the Contractor's option, the vehicle may be weighed on a second independent Department of Agriculture certified scale to verify the accuracy of the scale used for the independent weight check.

80048R

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION

Effective: September 1, 2000

FEDERAL OBLIGATION. The Department of Transportation, as a recipient of federal financial assistance, is required to take all necessary and reasonable steps to ensure nondiscrimination in the award and administration of contracts. Consequently, the federal regulatory provisions of 49 CFR part 26 apply to this contract concerning the utilization of disadvantaged business enterprises. This Special Provision will also be used by the Department to satisfy the requirements of the Business Enterprise for Minorities, Females, and Persons with Disabilities Act, 30 ILCS 575. For the purposes of this Special Provision, a disadvantaged business enterprise (DBE) means a business certified by the Department in accordance with the requirements of 49 CFR part 26 and listed in the DBE Directory or most recent addendum.

CONTRACTOR ASSURANCE: The Contractor makes the following assurance and agrees to include the assurance in each subcontract that the Contractor signs with a subcontractor:

The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of federally-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

OVERALL GOAL SET FOR THE DEPARTMENT: As a requirement of compliance with 49 CFR part 26, the Department has set an overall goal for DBE participation in its federally assisted contracts. That goal is 12.5% of all federal-aid funds the Department will expend in its federally assisted contracts for the subject reporting fiscal year. The Department is required to make a good faith effort to achieve this goal. The dollar amount paid to all approved DBE firms performing work called for in this contract is eligible to be credited toward fulfillment of the Department's overall goal.

CONTRACT GOAL TO BE ACHIEVED BY THE CONTRACTOR: This contract includes a specific DBE utilization goal established by the Department. The goal has been included because the Department has determined that the work of this contract has subcontracting opportunities that may be suitable for performance by DBE companies. This determination is based on an assessment of the type of work, the location of the work, and the availability of DBE companies to do a part of the work. The assessment indicates that, in the absence of unlawful discrimination, and in an arena of fair and open competition, DBE companies can be expected to perform 7.00% of the work. This percentage is set as the DBE participation goal for this contract. Consequently, in addition to the other award criteria established for this contract, the Department will award this contract to a bidder who makes a good faith effort to meet this goal of DBE participation in the performance of the work. A bidder makes a good faith effort for award consideration if either of the following is done in accordance with the procedures set forth in this Special Provision:

The bidder documents that firmly committed DBE participation has been obtained to meet the goal; or

The bidder documents that a good faith effort has been made to meet the goal, even though the effort did not succeed in obtaining enough DBE participation to meet the goal.

DBE LOCATOR REFERENCES: Bidders may consult the DBE Directory as a reference source for DBE companies certified by the Department. In addition, the Department maintains a letting and item specific DBE locator information system whereby DBE companies can register their interest in providing quotes on particular bid items advertised for letting. Information concerning DBE companies willing to quote work for particular contracts may be obtained by contacting the Department's Bureau of Small Business Enterprises at telephone number (217)785-4611, or by visiting the Department's web site at www.dot.state.il.us.

BIDDING PROCEDURES: Compliance with the bidding procedures of this Special Provision is required prior to the award of the contract and the failure of the as-read low bidder to comply will render the bid nonresponsive.

In order to assure the timely award of the contract, the as-read low bidder must submit a Disadvantaged Business Utilization Plan on Department form SBE 2026 within seven (7) working days after the date of letting. To meet the seven (7) day requirement, the bidder may send the Plan by certified mail or delivery service within the seven (7) working day period. If a question arises concerning the mailing date of a Plan, the mailing date will be established by the U.S. Postal Service postmark on the original certified mail receipt from the U.S. Postal Service or the receipt issued by a delivery service. It is the responsibility of the as-read low bidder to ensure that the postmark or receipt date is affixed within the seven (7) working days if the bidder intends to rely upon mailing or delivery to satisfy the submission day requirement. The Plan is to be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217)785-1524). It is the responsibility of the bidder to obtain confirmation of telefax delivery. The Department will not accept a Utilization Plan if it does not meet the seven (7) day submittal requirement, and the bid will be declared nonresponsive. In the event the bid is declared nonresponsive due to a failure to submit a Plan or failure to comply with the bidding procedures set forth herein, the Department may elect to cause the forfeiture of the penal sum of the bidder's proposal guaranty, and may deny authorization to bid the project if re-advertised for bids. The Department reserves the right to invite any other bidder to submit a Utilization Plan at any time for award consideration or to extend the time for award.

The Utilization Plan shall indicate that the bidder either has obtained sufficient DBE participation commitments to meet the contract goal or has not obtained enough DBE participation commitments in spite of a good faith effort to meet the goal. The Utilization Plan shall further provide the name, telephone number and telefax number of a responsible official of the bidder designated for purposes of notification of plan approval or disapproval under the procedures of this Special Provision.

The Utilization Plan shall include a DBE Participation Commitment Statement, Department form SBE 2025, for each DBE proposed for the performance of work to achieve the contract goal. The signatures on these forms must be original signatures. All elements of information indicated on the said form shall be provided, including but not limited to the following:

The name and address of each DBE to be used;

A description, including pay item numbers, of the commercially useful work to be done by each DBE;

The price to be paid to each DBE for the identified work specifically stating the quantity, unit price and total subcontract price for the work to be completed by the DBE. If partial pay items are to be performed by the DBE, indicate the portion of each item, a unit price where appropriate and the subcontract price amount;

A commitment statement signed by the bidder and each DBE evidencing availability and intent to perform commercially useful work on the project; and

If the bidder is a joint venture comprised of DBE firms and non-DBE firms, the plan must also include a clear identification of the portion of the work to be performed by the DBE partner(s).

The contract will not be awarded until the Utilization Plan submitted by the bidder is approved. The Utilization Plan will be approved by the Department if the Plan commits sufficient commercially useful DBE work performance to meet the contract goal. The Utilization Plan will not be approved by the Department if the Plan does not commit sufficient DBE performance to meet the contract goal unless the bidder documents that it made a good faith effort to meet the goal. The good faith procedures of Section VIII of this special provision apply. If the Utilization Plan is not approved because it is deficient in a technical matter, unless waived by the Department, the bidder will be notified and will be allowed no less than a five (5) working day period in order to cure the deficiency.

CALCULATING DBE PARTICIPATION: The Utilization Plan values represent work anticipated to be performed and paid for upon satisfactory completion. The Department is only able to count toward the achievement of the overall goal and the contract goal the value of payments made for the work actually performed by DBE companies. In addition, a DBE must perform a commercially useful function on the contract to be counted. A commercially useful function is generally performed when the DBE is responsible for the work and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. The Department and Contractor are governed by the provisions of 49 CFR part 26.55(c) on questions of commercially useful functions as it affects the work. Specific counting guidelines are provided in 49 CFR part 26.55, the provisions of which govern over the summary contained herein.

DBE as the Contractor: 100% goal credit for that portion of the work performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontracts to a non-DBE firm does not count toward the DBE goals.

DBE as a joint venture Contractor: 100% goal credit for that portion of the total dollar value of the contract equal to the distinct, clearly defined portion of the work performed by the DBE's own forces.

DBE as a subcontractor: 100% goal credit for the work of the subcontract performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontractor in turn subcontracts to a non-DBE firm does not count toward the DBE goal.

DBE as a trucker: 100% goal credit for trucking participation provided the DBE is responsible for the management and supervision of the entire trucking operation for which it is responsible. At least one truck owned, operated, licensed and insured by the DBE must be used on the contract. Credit will be given for the full value of all such DBE trucks operated using DBE employed drivers. Goal credit will be limited to the value of the reasonable fee or commission received by the DBE if trucks are leased from a non-DBE company.

DBE as a material supplier:

60% goal credit for the cost of the materials or supplies purchased from a DBE regular dealer.

100% goal credit for the cost of materials or supplies obtained from a DBE manufacturer.

100% credit for the value of reasonable fees and commissions for the procurement of materials and supplies if not a regular dealer or manufacturer.

GOOD FAITH EFFORT PROCEDURES: If the bidder cannot obtain sufficient DBE commitments to meet the contract goal, the bidder must document in the Utilization Plan the good faith efforts made in the attempt to meet the goal. This means that the bidder must show that all necessary and reasonable steps were taken to achieve the contract goal. Necessary and reasonable steps are those which could reasonably be expected to obtain sufficient DBE participation. The Department will consider the quality, quantity and intensity of the kinds of efforts that the bidder has made. Mere *pro forma* efforts are not good faith efforts; rather, the bidder is expected to have taken those efforts that would be reasonably expected of a bidder actively and aggressively trying to obtain DBE participation sufficient to meet the contract goal.

The following is a list of types of action that the Department will consider as part of the evaluation of the bidder's good faith efforts to obtain participation. These listed factors are not intended to be a mandatory checklist and are not intended to be exhaustive. Other factors or efforts brought to the attention of the Department may be relevant in appropriate cases, and will be considered by the Department.

Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.

Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.

Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.

a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.

b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Prime contractors are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable.

Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The contractor's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the contractor's efforts to meet the project goal.

Making efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as required by the recipient or contractor.

Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.

Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and Federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.

If the Department determines that the Contractor has made a good faith effort to secure the work commitment of DBE companies to meet the contract goal, the Department will award the contract provided that it is otherwise eligible for award. If the Department determines that a good faith effort has not been made, the Department will notify the bidder of that preliminary determination by contacting the responsible company official designated in the Utilization Plan. The preliminary determination shall include a statement of reasons why good faith efforts have not been found, and may include additional good faith efforts that the bidder could take. The notification will designate a five (5) working day period during which the bidder shall take additional efforts. The bidder is not limited by a statement of additional efforts, but may take other action beyond any stated additional efforts in order to obtain additional DBE commitments. The bidder shall submit an amended Utilization Plan if additional DBE commitments to meet the contract goal are secured. If additional DBE commitments sufficient to meet the contract goal are not secured, the bidder shall report the final good faith efforts made in the time allotted. All additional efforts taken by the bidder will be considered as part of the bidder's good faith efforts. If the bidder is not able to meet the goal after taking additional efforts, the Department will make a pre-final determination of the good faith efforts of the bidder and will notify the designated responsible company official of the reasons for an adverse determination.

The bidder may request administrative reconsideration of a pre-final determination adverse to the bidder within the five (5) working days after the notification date of the determination by delivering the request to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217)785-1524). Deposit of the request in the United States mail on or before the fifth business day shall not be deemed delivery. The pre-final determination shall become final if a request is not made and delivered. A request may provide additional written documentation and/or argument concerning the issue of whether an adequate good faith effort was made to meet the contract goal. In addition, the request shall be considered a consent by the bidder to extend the time for award. The request will be forwarded to the Department's Reconsideration Officer. The Reconsideration Officer will extend an opportunity to the bidder to meet in person in order to consider all issues of whether the bidder made a good faith effort to meet the goal. After the review by the Reconsideration Officer, the bidder will be sent a written decision within ten (10) working days after receipt of the request for reconsideration, explaining the basis for finding that the bidder did or did not meet the goal or make adequate good faith efforts to do so. A final decision by the Reconsideration Officer that a good faith effort was made shall approve the Utilization Plan submitted by the bidder and shall clear the contract for award. A final decision that a good faith effort was not made shall render the bid nonresponsive.

CONTRACT COMPLIANCE: Compliance with this Special Provision is an essential part of the contract. The Department is prohibited by federal regulations from crediting the participation of a DBE included in the Utilization Plan toward either the contract goal or the Department's overall goal until the amount to be applied toward the goals has been paid to the DBE. The following administrative procedures and remedies govern the compliance by the Contractor with the contractual obligations established by the Utilization Plan. After approval of the Plan and award of the contract, the Utilization Plan and individual DBE Participation Statements become part of the contract. If the contractor did not succeed in obtaining enough DBE participation to achieve the advertised contract goal, and the Utilization Plan was approved and contract awarded based upon a determination of good faith, the total dollar value of DBE work calculated in the approved Utilization Plan as a percentage of the awarded contract value shall become the amended contract goal.

No amendment to the Utilization Plan may be made without prior written approval from the Department's Bureau of Small Business Enterprises. All requests for amendment to the Utilization Plan shall be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764. Telephone number (217) 785-4611. Telefax number (217) 785-1524.

All work indicated for performance by an approved DBE shall be performed, managed and supervised by the DBE executing the Participation Statement. The Contractor shall not terminate for convenience a DBE listed in the Utilization Plan and then perform the work of the terminated DBE with its own forces, those of an affiliate or those of another subcontractor, whether DBE or not, without first obtaining the written consent of the Bureau of Small Business Enterprises to amend the Utilization Plan. If a DBE listed in the Utilization Plan is terminated for reasons other than convenience, or fails to complete its work on the contract for any reason, the Contractor shall make good faith efforts to find another DBE to substitute for the terminated DBE. The good faith efforts shall be directed at finding another DBE to perform at least the same amount of work under the contract as the DBE that was terminated, but only to the extent needed to meet the contract goal or the amended contract goal. The Contractor shall notify the Bureau of Small Business Enterprises of any termination for reasons other than convenience, and shall obtain approval for inclusion of the substitute DBE in the Utilization Plan. If good faith efforts following a termination of a DBE for cause are not successful, the Contractor shall contact the Bureau and provide a full accounting of the efforts undertaken to obtain substitute DBE participation. The Bureau will evaluate the good faith efforts in light of all circumstances surrounding the performance status of the contract, and determine whether the contract goal should be amended.

The Contractor shall maintain a record of payments for work performed to the DBE participants. The records shall be made available to the Department for inspection upon request. After the performance of the final item of work or delivery of material by a DBE and final payment therefor to the DBE by the Contractor, but not later than thirty (30) calendar days after payment has been made by the Department to the Contractor for such work or material without regard to any retainage withheld by the Department, the Contractor shall submit a DBE Payment Report on Department form SBE 2115 to the District Engineer. If full and final payment has not been made to the DBE, the Report shall indicate whether a disagreement as to the payment required exists between the Contractor and the DBE or if the Contractor believes that the work has not been satisfactorily completed. If the Contractor does not have the full amount of work indicated in the Utilization Plan performed by the DBE companies indicated in the Plan, the Department will deduct from contract payments to the Contractor the amount of the goal not achieved as liquidated and ascertained damages.

The Department reserves the right to withhold payment to the Contractor to enforce the provisions of this Special Provision. Final payment shall not be made on the contract until such time as the Contractor submits sufficient documentation demonstrating achievement of the goal in accordance with this Special Provision or after liquidated damages have been determined and collected.

80029

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

	Page
I. General	1
II. Nondiscrimination	1
III. Nonsegregated Facilities	3
IV. Payment of Predetermined Minimum Wage.....	3
V. Statements and Payrolls	6
VI. Record of Materials, Supplies, and Labor.....	7
VIII. Safety: Accident Prevention	7
IX. False Statements Concerning Highway Projects.....	7
X. Implementation of Clean Air Act and Federal Water Pollution Control Act	8
XI. Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion	8
XII. Certification Regarding Use of Contract Funds for Lobbying	9

ATTACHMENTS

- A. Employment Preference for Appalachian Contracts
(included in Appalachian contracts only)

I. GENERAL

1. These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.

3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.

4. A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

Section I, paragraph 2;
Section IV, paragraphs 1, 2, 3, 4 and 7;
Section V, paragraphs 1 and 2a through 2g.

5. Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6 and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.

6. Selection of Labor: During the performance of this contract, the contractor shall not:

a. Discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or

b. Employ convict labor for any purpose within the limits of

the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630 and 41 CFR 60 (and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 *et seq.*) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the State highway agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.

b. The contractor will accept as his operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job-training."

2. EEO Officer: The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above

agreement will be met, the following actions will be taken as a minimum:

- a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
- b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
- c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.
- d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
- e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.

- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employees referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish which such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.
- b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)
- c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
- b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any

evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:

a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.

b. The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to

the SHA and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or quailifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the SHA.

8. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.

a. The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.

b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.

c. The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.

9. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and

(4) The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.

b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.

b. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, timeclocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

c. The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of \$10,000 or more and that it will retain such certifications in its files.

IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

1. General:

a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3) issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c)] the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the

contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b)(2) of the Davis-Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.

b. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.

c. All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2. Classification:

a. The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.

b. The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:

(1) the work to be performed by the additional classification requested is not performed by a classification in the wage determination;

(2) the additional classification is utilized in the area by the construction industry;

(3) the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and

(4) with respect to helpers, when such a classification prevails in the area in which the work is performed.

c. If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or

disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the question, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3. Payment of Fringe Benefits:

a. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.

b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any cost reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4. Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:

a. Apprentices:

(1) Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.

(2) The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not

be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

(3) Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

(4) In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b. Trainees:

(1) Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.

(2) The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(3) Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the

Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which cases such trainees shall receive the same fringe benefits as apprentices.

(4) In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV. 2. Any worker listed on a payroll at a helper wage rate, who is not a helper under an approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. Apprentices and Trainees (Programs of the U.S. DOT):

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. Withholding:

The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainee's and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. Overtime Requirements:

No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. Violation:

Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of \$10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9. Withholding for Unpaid Wages and Liquidated Damages:

The SHA shall, upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1. Compliance with Copeland Regulations (29 CFR 3):

The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2. Payrolls and Payroll Records:

- a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.
- b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan

or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.

c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period).

The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V.

This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029-005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the Contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

- (1) that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;
- (2) that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;
- (3) that each laborer or mechanic has been paid not less than the applicable wage rate and fringe benefits or cash equivalent for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

e. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.

f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S. C. 1001 and 31 U.S.C. 231.

g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for

inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

1. On all federal-aid contracts on the national highway system, except those which provide solely for the installation of protective devices at railroad grade crossings, those which are constructed on a force account or direct labor basis, highway beautification contracts, and contracts for which the total final construction cost for roadway and bridge is less than \$1,000,000 (23 CFR 635) the contractor shall:

a. Become familiar with the list of specific materials and supplies contained in Form FHWA-47, "Statement of Materials and Labor Used by Contractor of Highway Construction Involving Federal Funds," prior to the commencement of work under this contract.

b. Maintain a record of the total cost of all materials and supplies purchased for and incorporated in the work, and also of the quantities of those specific materials and supplies listed on Form FHWA-47, and in the units shown on Form FHWA-47.

c. Furnish, upon the completion of the contract, to the SHA resident engineer on Form FHWA-47 together with the data required in paragraph 1b relative to materials and supplies, a final labor summary of all contract work indicating the total hours worked and the total amount earned.

2. At the prime contractor's option, either a single report covering all contract work or separate reports for the contractor and for each subcontract shall be submitted.

VII. SUBLETTING OR ASSIGNING THE CONTRACT

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).

a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a

whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract.

Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

VIII. SAFETY: ACCIDENT PREVENTION

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification,

distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

NOTICE TO ALL PERSONNEL ENGAGED ON FEDERAL-AID HIGHWAY PROJECTS

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more than \$10,000 or imprisoned not more than 5 years or both."

X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$100,000 or more).

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 et seq., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.

2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.

3. That the firm shall promptly notify the SHA of the receipt of

any communication from the Director, Office of Federal Activities, EPA indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

4. That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1. Instructions for Certification - Primary Covered Transactions:

(Applicable to all Federal-aid contracts - 49 CFR 29)

a. By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.

d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.

f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled

"Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded from Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Primary Covered Transactions

1. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:

- a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
- b. Have not within a 3-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
- c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and
- d. Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

2. Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Covered Transactions:

(Applicable to all subcontracts, purchase orders and other lower tier transactions of \$25,000 or more - 49 CFR 29)

- a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
- b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.
- c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
- d. The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.
- e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
- f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
- g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.
- h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealing.
- i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily

excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

Certification Regarding Debarment, Suspension, Ineligibility And Voluntary Exclusion-Lower Tier Covered Transactions:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 - 49 CFR 20)

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**MINIMUM WAGES FOR FEDERAL AND FEDERALLY
ASSISTED CONSTRUCTION CONTRACTS**

This project is funded, in part, with Federal-aid funds and, as such, is subject to the provisions of the Davis-Bacon Act of March 3, 1931, as amended (46 Sta. 1494, as amended, 40 U.S.C. 276a) and of other Federal statutes referred to in a 29 CFR Part 1, Appendix A, as well as such additional statutes as may from time to time be enacted containing provisions for the payment of wages determined to be prevailing by the Secretary of Labor in accordance with the Davis-Bacon Act and pursuant to the provisions of 29 CFR Part 1. The prevailing rates and fringe benefits shown in the General Wage Determination Decisions issued by the U.S. Department of Labor shall, in accordance with the provisions of the foregoing statutes, constitute the minimum wages payable on Federal and federally assisted construction projects to laborers and mechanics of the specified classes engaged on contract work of the character and in the localities described therein.

General Wage Determination Decisions, modifications and supersedes decisions thereto are to be used in accordance with the provisions of 29 CFR Parts 1 and 5. Accordingly, the applicable decision, together with any modifications issued, must be made a part of every contract for performance of the described work within the geographic area indicated as required by an applicable DBRA Federal prevailing wage law and 29 CFR Part 5. The wage rates and fringe benefits contained in the General Wage Determination Decision shall be the minimum paid by contractors and subcontractors to laborers and mechanics.

NOTICE

The most current **General Wage Determination Decisions** (wage rates) are available on the IDOT web site. They are located on the Letting and Bidding page at <http://www.dot.state.il.us/desenv/delett.html>.

In addition, ten (10) days prior to the letting, the applicable Federal wage rates will be e-mailed to subscribers. It is recommended that all contractors subscribe to the Federal Wage Rates List or the Contractor's Packet through IDOT's subscription service.

PLEASE NOTE: if you have already subscribed to the Contractor's Packet you will automatically receive the Federal Wage Rates.

The instructions for subscribing are at <http://www.dot.state.il.us/desenv/subsc.html>.

If you have any questions concerning the wage rates, please contact IDOT's Chief Contract Official at 217-782-7806.

MINIMUM WAGES FOR FEDERAL AND FEDERALLY ASSISTED CONSTRUCTION CONTRACTS

This project is funded, in part, with Federal-aid funds and, as such, is subject to the provisions of the Davis-Bacon Act of March 3, 1931, as amended (46 Sta. 1494, as amended, 40 U.S.C. 276a) and of other Federal statutes referred to in a 29 CFR Part 1, Appendix A, as well as such additional statutes as may from time to time be enacted containing provisions for the payment of wages determined to be prevailing by the Secretary of Labor in accordance with the Davis-Bacon Act and pursuant to the provisions of 29 CFR Part 1. The prevailing rates and fringe benefits shown in the General Wage Determination Decisions issued by the U.S. Department of Labor shall, in accordance with the provisions of the foregoing statutes, constitute the minimum wages payable on Federal and federally assisted construction projects to laborers and mechanics of the specified classes engaged on contract work of the character and in the localities described therein.

General Wage Determination Decisions, modifications and supersedes decisions thereto are to be used in accordance with the provisions of 29 CFR Parts 1 and 5. Accordingly, the applicable decision, together with any modifications issued, must be made a part of every contract for performance of the described work within the geographic area indicated as required by an applicable DBRA Federal prevailing wage law and 29 CFR Part 5. The wage rates and fringe benefits contained in the General Wage Determination Decision

NOTICE

The most current **General Wage Determination Decisions** (wage rates) are available on the IDOT web site. They are located on the Letting and Bidding page at <http://www.dot.state.il.us/desenv/delett.html>.

In addition, ten (10) days prior to the letting, the applicable Federal wage rates will be e-mailed to subscribers. It is recommended that all contractors subscribe to the Federal Wage Rates List or the Contractor's Packet through IDOT's subscription service.

PLEASE NOTE: if you have already subscribed to the Contractor's Packet you will automatically receive the Federal Wage Rates.

The instructions for subscribing are at <http://www.dot.state.il.us/desenv/subsc.html>.

If you have any questions concerning the wage rates, please contact IDOT's Chief Contract Official at 217-782-7806.